




Professional Series Led Strips

ACCX-5630-BX-Wxx

SMD5630 72 LED/m dimmable LED strip



Product Features

IP rating: IP65.


Easy installing for many ways.

Adjustable for all kinds of Led decorations.

Safety input 230V.

Certified by RoHS.

VAC220 series

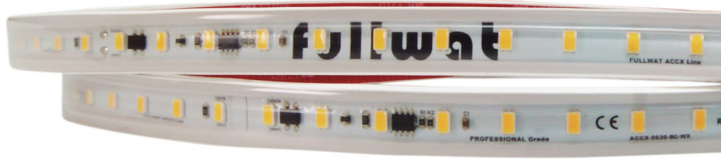

SMD5630 72 LED/m dimmable LED strip

- 72**
Led/m
- 14**
W/m
- 220-240**
VAC
- Warranty up to
5
Years
- ≤1470**
lm/m
- LED SMD
5630
- MacAdam
3 level
SDCM
BIN1
- standard
CRI
>80
- PF**
>0,96
- grado
IK08






White color temperature range



- 50** Max. meters in series
(one side powered)
- VHB 3M**
- driver **NOT** included
- 120°
- 13.88mm
- 16.7cm
- 30.000 h
- Do not Bend
- 100*** Max. meters in series
(two side powered)
- ESD
- Dimmable
- Alu profile suggested
- 25/50m
- Working 55°C
-20°C
- Storage 60°C
-40°C

* Make sure that you connect side poles L & N in same position strictly at both sides.

Features


Part number	CCT / wavelength	Luminous intensity per m / flux	Efficiency lm / W	Energy efficiency	Waterproof strip
 ACCX-5630-BH-W/25/50	±2700k	±1400lm	±100	E	 25000 / 5000mm 6,5mm 15mm No color temperature deviation.
 ACCX-5630-BC-W/25/50	±3000k	±1400lm	±100	E	
 ACCX-5630-BN-W/25/50	±4000k	±1470lm	±105	E	
 ACCX-5630-BF-W/25/50	±6500k	±1470lm	±105	E	

25 — length 25m
50 — length 50m

Product size

Frontal view

Units: mm

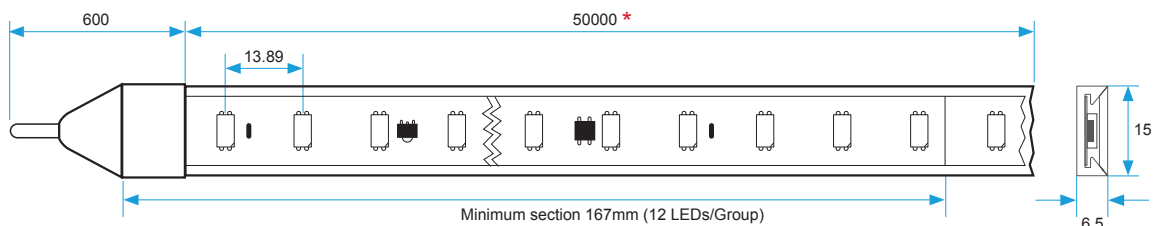

* 25 meter models for references ACCX-5630-BX-W/25.
50 meter models for references ACCX-5630-BX-W/50.

Accessories

Connectors (Order Qty.no MOQ)

Waterproof Junction Box



ISSIA-FL-BOX1

Waterproof 2 PIN connector



CPROOF-2H
CPROOF-2M

End cap, End cap with power cord

End cap (Indoor & Outdoor)



ACCX-5630-W-CAP

End cap with power cord (Indoor & Outdoor)



ACCX-5630-W-WIRE

Connectors (Order Qty.no MOQ)

L snap connector (Indoor)



ACCX-5630-W-CON-L

Splice connector (Indoor)



ACCX-5630-W-CON-I

Jumper (Indoor & Outdoor)



ACCX-5630-W-JOIN

End cap with power plug (Indoor)



ACCX-5630-W-PLUG

Mounting Accesories

Mounting clips



ACCX-5630-W-CLIP

Ultraviolet hand lamp



ACCX-UV-LAMP

UV adhesive tube



ACCX-UV-ADH

Profiles




Consult the Fullwat LED profiles catalog

Installation

INSTALLATION ON THE WALL VIA MOUNTING CLIPS


Installation on Masonry Wall

- ① Wall Plug
- ② Mounting Clip
- ③ Flat-head Screw

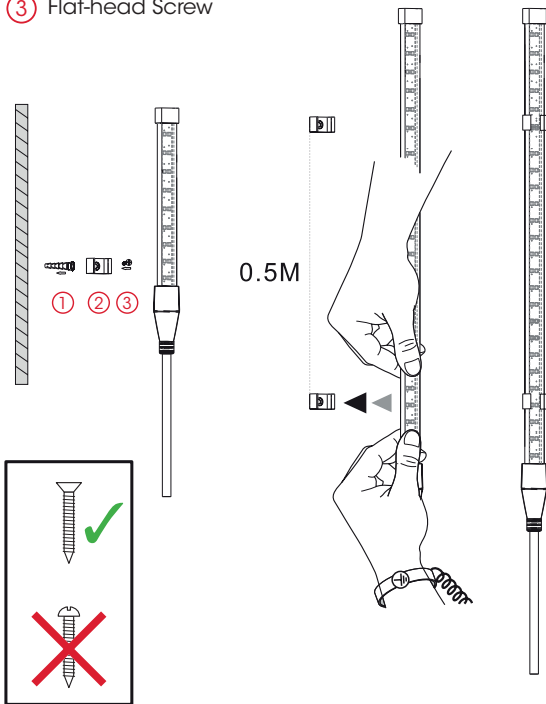


Installation on Panelling Wall

- ① Wall Plug
- ② Mounting Clip
- ③ Flat-head Screw

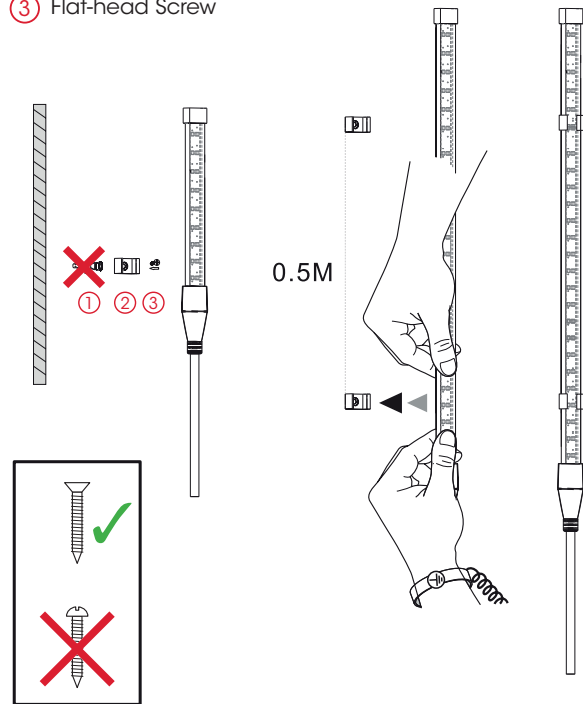

INSTALLATION VIA ALUMINIUM PROFILE

- ① Wall Plug
- ② Profile
- ③ Flat-head Screw
- ④ 220VAC LED Tape Light


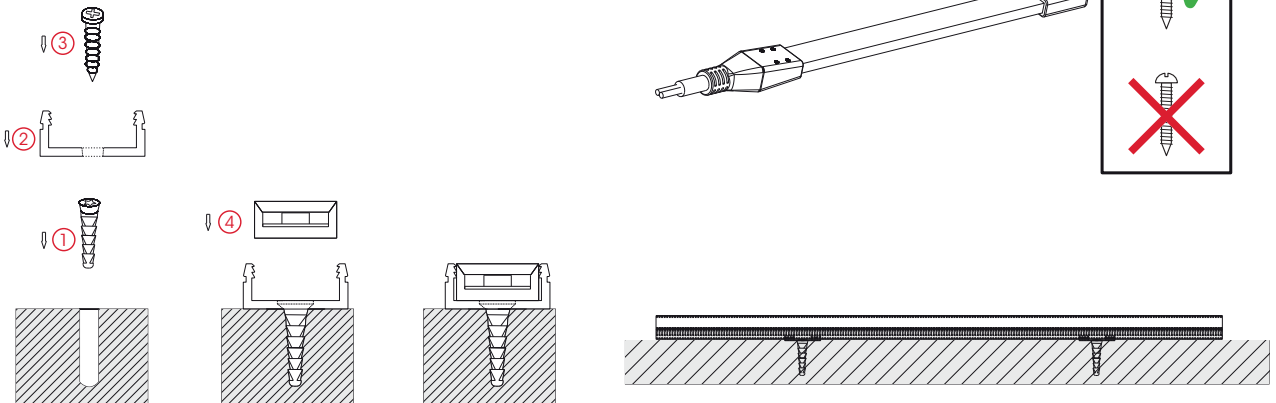


Finish installation

INSTALLATION VIA PVC SLOT


Installation on Masonry Wall

- ① Wall Plug
- ② PVC Slot (Slot the hole by customers themselves)
- ③ Flat-head Screw

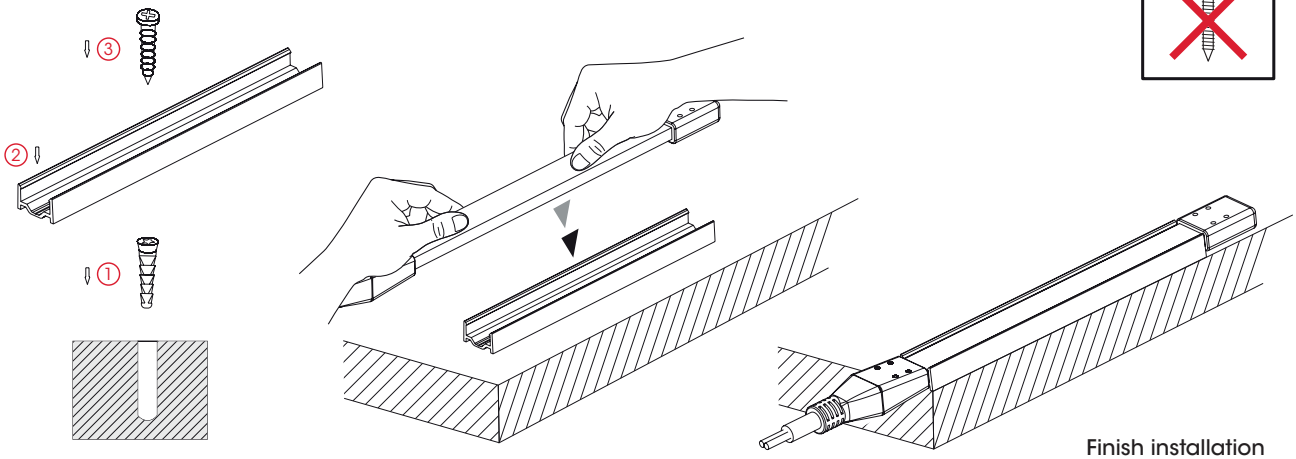

INSTALLATION VIA PROHIBITION

- Don't install in spraying environment.
- Don't install under water.
- Don't install in high corrosive environment.
- Don't install in high temperature and humidity environment.
- Don't install at sea water splashing area.



ATTENTION

- Please don't cut the product at random, or may drop the grade of protection.
- In a special situation, if you must cut the product, you need to do a professional protective for out line ends and cutting ends.

Packaging



LED tape light with film for protection



Put one roll in the antistatic bag



Put in carton














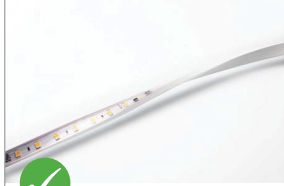



Finish packing

Remarks

- For lighting chains with non-replaceable lamps:
 - "The lamps are not replaceable".
- For class II lighting chains with non-replaceable lamps, the substance of following:
 - where breakage or damage to lamps occurs the chain must not be used/energised but disposed of safely.
- For type Z attachments:
 - The external flexible cable or cord of this lighting chains cannot be replaced; if the cord is damaged, the lighting chains shall be destroyed.
- For all rope lights where the packing has not been adapted for display purposes:
 - "Do not connect the rope light to the supply while it is in the packing or wound onto a reel";
 - "Do not use the rope light when covered or recessed in to a surface";
 - minimum allowed bending radius, if applicable;
 - "Do not open or cut the rope light".
- When supply connector used with terminal block or lead wires, which shall be exclusively installation by the manufacturer of his service agent or a similar qualified person in order to avoid a hazard.

High voltage LED strip instruction and caution

 <p></p> <p>Before installation, please take out the strips as shown for better use.</p>	 <p>Parallely</p> <p></p> <p>Keep the strip in a straight line while installing.</p>	 <p></p> <p>In 1m long situation, the strips could be curved with 360° maximum.</p>	 <p></p> <p>The minimum bending diameter is 100mm.</p>
 <p></p> <p>Do not fold the strip in half.</p>	 <p></p> <p>Do not twist the strip in the bonding pad position.</p>	 <p></p> <p>Do not bend or stress on the strips form the side.</p>	<p></p> <p>Attention:</p> <p>Be sure to confirm the install location well before applying power to strips. Once the strip is lighting, or its temperature higher than 40°C, please do not pull it.</p>