



---

FU-CLI1000-8.4V

FU-CLI1000-8.4V • Li-Ion battery charger




FU-CL1000-8.4V • Li-Ion battery charger

1. Electrical specification

FU-CL1000-8.4V				
Input voltage	Minimum	Normal	Maximum	Unit
	100	115/230	240	Vrms
Frequency	47Hz-63Hz			
Current	0.2A (MAX)			
Inrush current	115V/40A(max.), 230V/80A(max.) at 25°C at cold start.			
Power efficiency	80% (min.) at full load, 110Vac or 230Vac 50Hz.			

2. Output

Charge curve

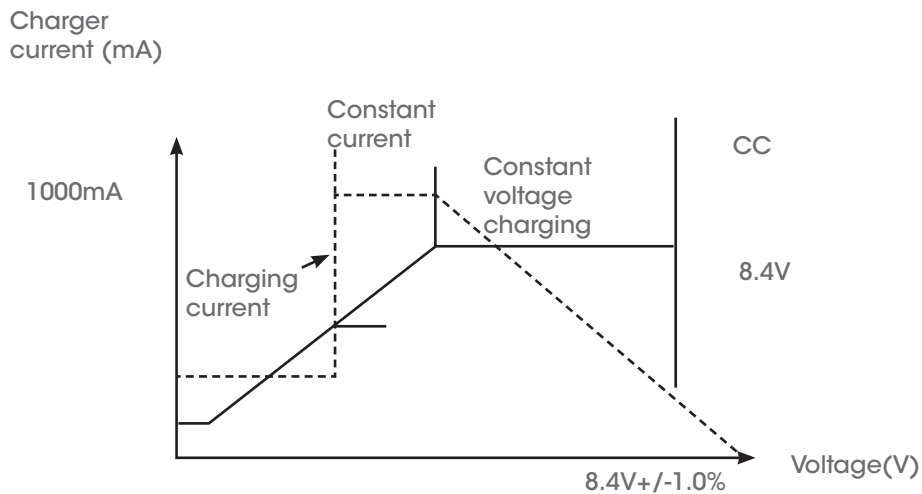

- Its output voltage is 4.2 +/- 1%V at standby.
- Led display:  
Green on standby  
Red on charging  
Green on full charge when charging current drop to 100 +/- 50mA.

### 3. Protection

- Over voltage protection:  
Output over voltage protection with zener diode.
- Short circuit protection:  
The output short to ground, it will auto-recovery without damage.
- Output reverse input protection:  
When output reverse input, the unit and the battery will be no damage.

### 4. HI-POT

HI-POT  
P~S:3000Vac 3S,the leakage current is lower than 10mA.

### 5. Environment

- Ambient operation temperature:  
0°C to +40°C
- Ambient operation relative humidity:  
20% to 85%
- Ambient storage temperature:  
-40°C to +70°C
- Ambient storage relative humidity:  
10% to 95%

### 6. Safety

CE

### 7. EMC:

FCC part15  
EN55022 classB  
EN55024  
EN61000-3-2  
EN61000-3-3

### 8. Drop test

Freely drop the wooden board from the height of 75cm  
for two times per side(front/back/left/right).

FU-CLI1000-8.4V • Li-Ion battery charger

**9.Vibration test**

- Vibration frequency:5-60-5Hz with 10 octave/min@2.1G 9.2
- Three circles per axis(X,Y,Z) for 10minutes.

**10.MTBF**

- 40,000 hours base on bellcore TR332 document required at 25°C.

