

LIVEN LV Series

AGM (Absorbent Glass Material) technology with gas recombination. VRLA (Valve Regulated Lead Acid Battery). Maintenance-Free Sealed Lead Acid Battery. Battery with 5 years design life in float service.

Cycle use 1: Up to 260 cycles at 100% DOD.

Cycle use 2: Up to 500 cycles at 50% DOD.

Application:

- Telecommunications
- Uninterrupted Power Supplies
- Medical equipments
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply



Specification:


Cells Per Unit	6
Voltage Per Unit	12V
Nominal Capacity	1.3Ah @20hour-rate to 1.75V per cell @25°C
Weight	Approx. 0.52Kg ±2% (1.15lbs)
Internal Resistance	Approx. 95mΩ
Terminal	F1
Max. Discharge Current	13A (5sec)
Short Circuit Current	68A
Design Life	5 years (Float charging) Eurobat (20°C): 3-5 years
Recommended Maximum Charging Current	0.39A
Standby Use Voltage	13.7V~13.9V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6V~14.8V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -15°C~50°C Charge: -10°C~45°C Storage: -15°C~50°C
Normal Operating Temperature Range	25°C±5°C
Self Discharge	LIVEN Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.

Dimensions:

Length	98±1.5mm (3.86in)
Width	43.5±1.5mm (1.71in)
Height	53±1.5mm (2.09in)
Total Height	59±1.5mm (2.32in)



Technical Drawing:

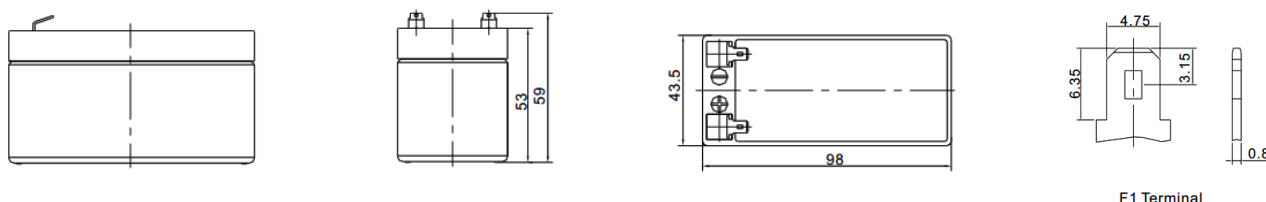


Constant Current Discharge (CC, Unit: A) at 25°C (77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	5.154	3.361	2.480	1.435	0.829	0.489	0.356	0.283	0.239	0.160	0.130	0.068
1.65V	4.968	3.261	2.415	1.404	0.814	0.482	0.351	0.280	0.236	0.158	0.129	0.067
1.70V	4.726	3.130	2.329	1.362	0.794	0.473	0.345	0.275	0.233	0.156	0.127	0.066
1.75V	4.415	2.960	2.218	1.307	0.767	0.460	0.336	0.269	0.228	0.153	0.125	0.065
1.80V	4.022	2.743	2.075	1.237	0.732	0.443	0.325	0.261	0.221	0.149	0.122	0.064
1.85V	3.540	2.471	1.895	1.146	0.687	0.422	0.311	0.250	0.213	0.144	0.118	0.061


Constant Power Discharge (CP, Unit: W/Battery) at 25°C (77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	53.22	34.80	26.40	15.90	9.42	5.64	4.14	3.30	2.82	1.92	1.56	0.84
1.65V	52.68	34.68	26.28	15.78	9.36	5.58	4.08	3.30	2.76	1.86	1.56	0.78
1.70V	50.64	33.66	25.56	15.36	9.18	5.52	4.02	3.24	2.76	1.86	1.50	0.78
1.75V	48.18	32.40	24.66	14.94	8.88	5.40	3.96	3.18	2.70	1.86	1.50	0.78
1.80V	44.64	30.54	23.40	14.22	8.52	5.22	3.84	3.12	2.64	1.80	1.44	0.78
1.85V	40.02	27.96	21.66	13.32	8.04	4.98	3.72	3.00	2.52	1.74	1.44	0.78


Discharge Characteristics Curve

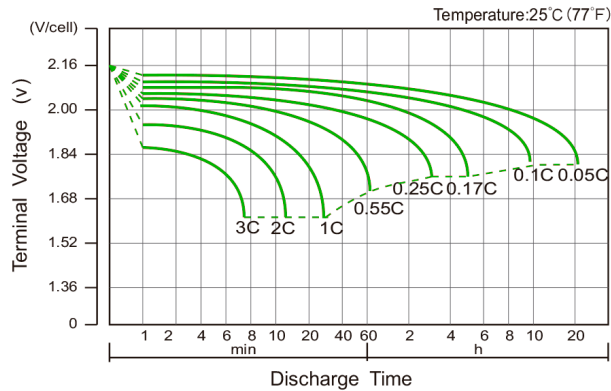


Charge Characteristic Curve For Standby Use

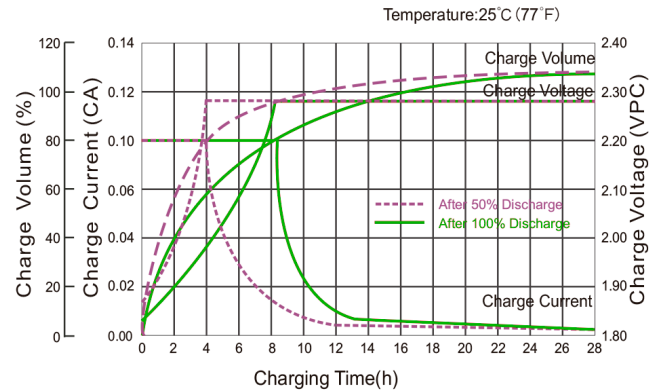


Cycle Life In Relation To Depth Of Discharge

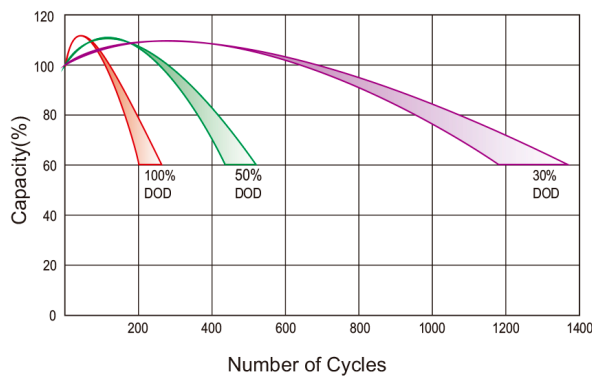


Relationship Between Charging Voltage And Temperature

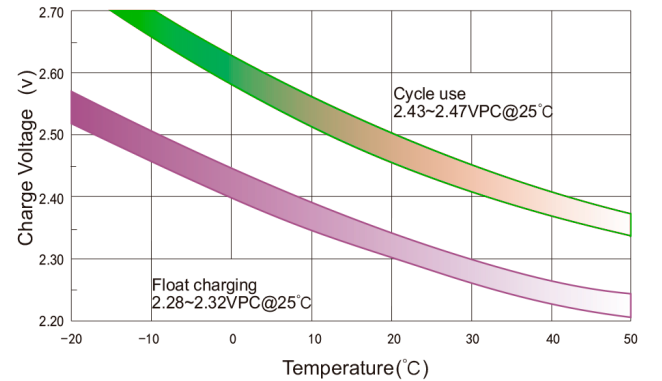


Temperature Effects On Capacity

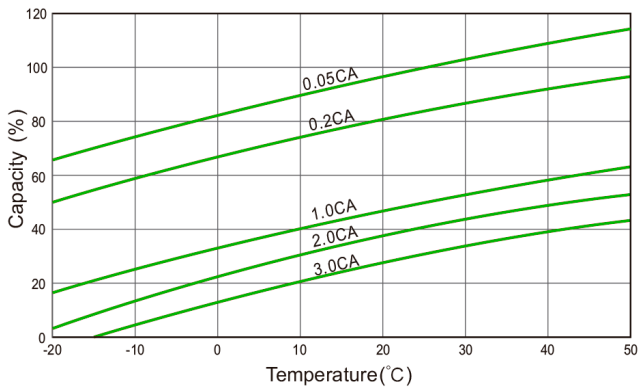


Storage Characteristics

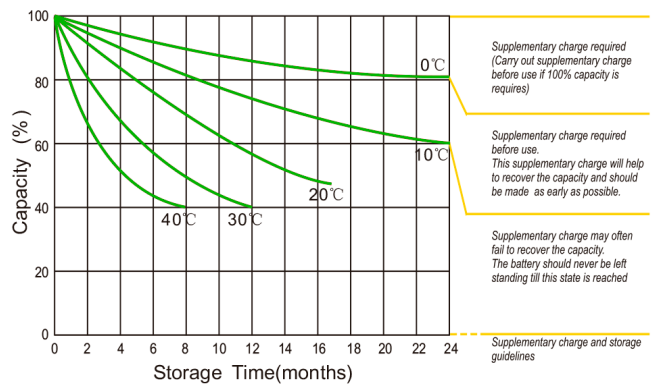

Effect Of Temperature On Long Term Life

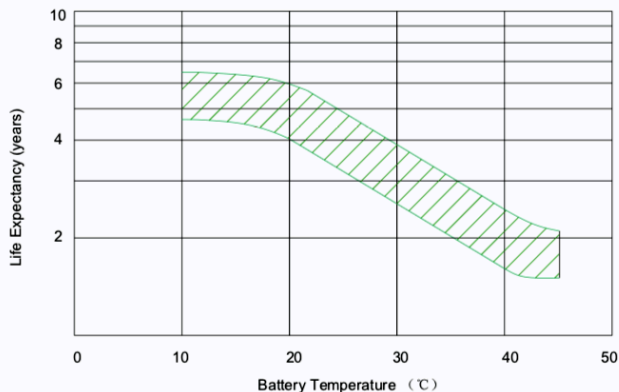

Life Characteristics Of Standby Use

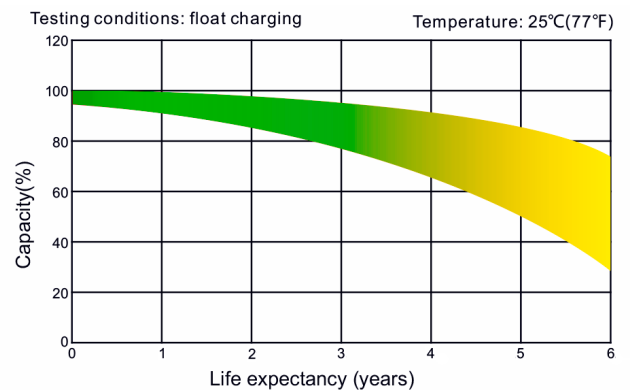

(Note) All above information shall be changed without prior notice. LIVEN Battery reserves the right to explain and update the latest information.