




Minwa Electronics Co.,Ltd
® Minwa Green Energy Electronics Co.,Ltd

MW2101MOD • AC/DC switching adapter



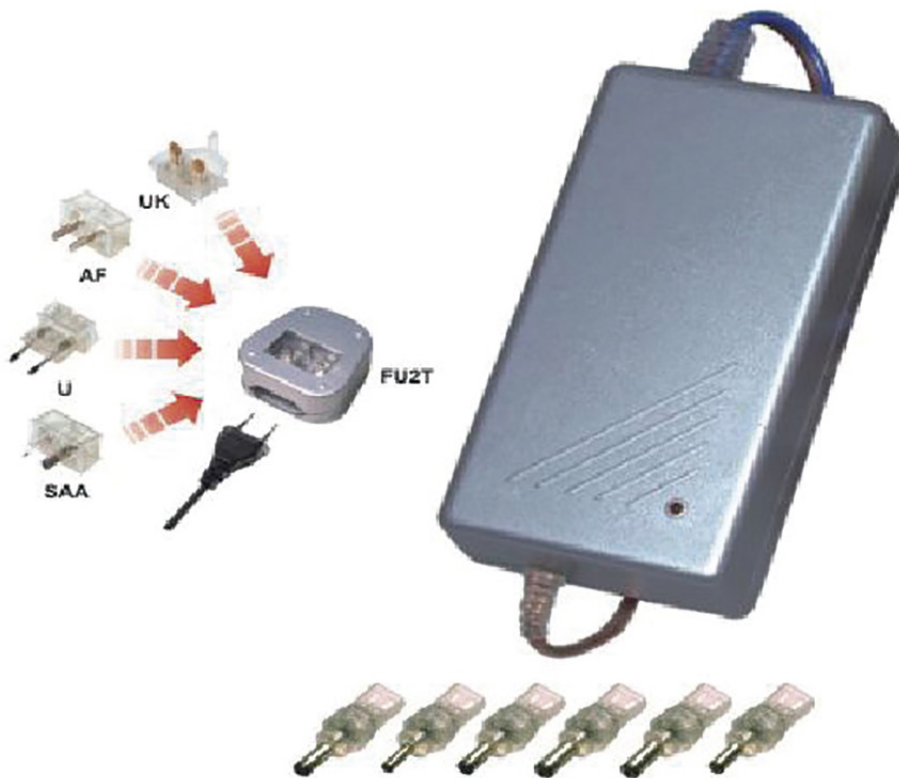

Minwa Electronics Co.,Ltd

Minwa Green Energy Electronics Co.,Ltd

MW2101MOD • AC/DC switching adapter

1. Electrical data

Input	Input voltage / frequency	100-240V/50Hz
	Input current	1300mA
Output	Rated output voltage	15-16-17-18-20-22V
	Rated output load current	2500mA
	Rated output power	55VA(MAX)
Resistance	Insulation resistance	100MΩ (measured with 500V DC voltage)
	Withstand voltage (Hi-Pot)	AC 3000V 50Hz for 1minute or AC 3300V 2 Seconds

2. Mechanical data

Supply connection type	VDE Approval Power Cord And Plug With Computer's Plug MWFU2T
Primary turns & wire gauge	Primary 24T/0.40mm
Secondary turns & wire gauge	5T/0.05X15mm Copper-Foil
Core	Magnetic Core
Output plug dimensions	6MC: 5.5×1.75×(12±0.5)mm 6.5×1.0×(12±0.5)mm 5.5×2.1×(12±0.5)mm 3.5×1.35×(10±0.5)mm 5.5×2.5 ×(12±0.5)mm 4.75×1.75×(12±0.5)mm
Polarity	Reversible by "FX12" Plug
Unit weight	470g
Dimensions	136(L)×70(W)×37(H)