


ISSIA-T8 Series • LED Glass Tube T8-H version



Features

- Ultra bright SMD LED.
- Opal glass tube lamp body, built-in high efficiency constant current drive power supply.
- Replaceable of T8 and T10 fluorescent tube.

Dimension (mm)

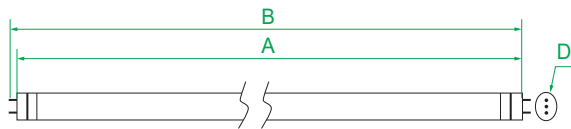

Length	A Max.	B Min.	Max.	D
0.6m	598.8	594.5	596.5	Ø26
0.9m	894.6	899.5	901.5	Ø26
1.2m	1199	1204.5	1206.5	Ø26
1.5m	1499	1505	1507	Ø26

Technical data

Item No.	ISSIA-T8-060L	ISSIA-T8-090L	ISSIA-T8-120L	ISSIA-T8-150L
Power	10W	15W	20W	25W
Voltage	AC220-240V	AC220-240V	AC220-240V	AC220-240V
Color Temperature	3000/4000/6500K	3000/4000/6500K	3000/4000/6500K	3000/4000/6500K
Luminous Flux	1000lm	1500lm	2000lm	2500lm
CRI/Ra	>80	>80	>80	>80
Color consistency	5SDCM	5SDCM	5SDCM	5SDCM
Power factor	≥0.5	≥0.5	≥0.5	≥0.5
Beam angle	300°	300°	300°	300°
Lumen maintenance factor	85%	85%	85%	85%
Flicking	Free (<2.5%)	Free (<2.5%)	Free (<2.5%)	Free (<2.5%)
Nominal life time	25000h	25000h	25000h	25000h
Working temperature	-20~+40°C	-20~+40°C	-20~+40°C	-20~+40°C
Qty./CTN(pcs)	20	20	20	20
Net weight/ctn(kg)	5	8	13	13
Size of outer box(mm)	660*180*190		1270*180*190	1600*180*190

- The above specification are typical values. They are based on a maximum usage time of 4000h/year in accordance with ON-OFF cycles established by IEC standards.
- Power and luminous flux of the limits of tolerance is ±10%, color rendering index of the tolerance range is ±5.
- Recommended working temperature is below 35°C, reach or exceed 45°C have reduce the potential risk of lamps and lanterns of life.
- Detailed product sizes please refer to the follow-up product size chart.

Notes:

*The Specifications of the product may be modified for improvement without notice.