


UKAI BILBAO
Ribera Elorrieta 7C
48015 Bilbao
Teléfono: 94 474 5252
Fax: 94 475 9710
e-mail: ukai@ukai.com

UKAI BARCELONA
Avda. Vallcarca 74-76
08023 Barcelona
Teléfono: 93 284 0898
Fax: 93 210 6765
e-mail: ukai@ukai.com

UKAI MADRID
Avda Andalucía 2, 2ª planta local 211
28702 San Sebastián de los Reyes
Teléfono: 91 659 0328
Fax: 91 659 0558
e-mail: ukaimad@ukai.com

Note:

- *1. LCD Display Type : STN, Negative, Transmissive Δ
- *2. Viewing Direction : 6H
- *3. Duty : 1/16 , Bias : 1/5 Δ
- *4. Operating Voltage : 5.0V Δ
- *5. Backlight Color : White
- *6. Operating Temperature : -20°C~70°C
- *7. Storage Temperature : -30°C~80°C
- *8. An external VR(5k) must be connected for Contrast Control. Δ

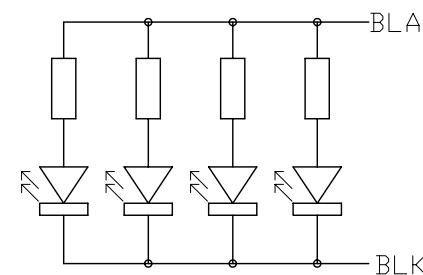

Backlight Circuit
(No. of LEDs = 4pcs)
Scale=free

C		
B	-Revise LCD Wiring Details -Add Note	Li Shuai 2006-02-13
A	-Revise LCD Display Type	Li Shuai 2005-04-18
Rev	Note	Date
Dwg Title LMB204BFC Outline Dwg		
Dwg No.	MK-000680b-1-1	Date 2004-12-14
Scale 2/1	Tol. ±0.5	Unit mm
Approved	Checked	Paper Size A3
		Drawn Li Shuai

TOPWAY