

UL 12 - 12

12V 12AH

STANDBY


Ultracell®

'Quality in Every Language'



Image



Terminal Type

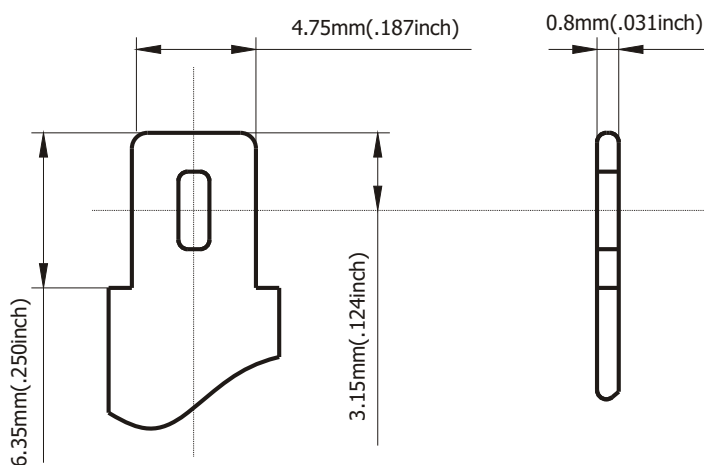

Dimensions

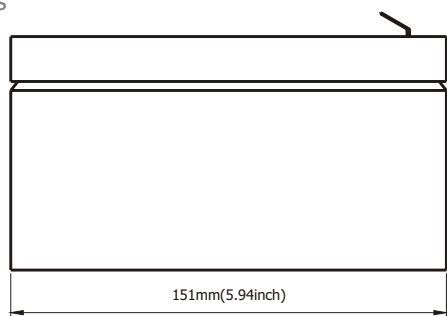

Specifications

Battery Model	UL 12 - 12			
Designed Floating Life	5 Years			
Capacity (25°C)	20HR (0.6A, 1.75V)	10HR (1.14A, 1.75V)	5HR (2.04A, 1.75V)	1HR (7.2A, 1.55V)
	12AH	11.4AH	10.2AH	7.2AH
Dimensions	Length	Width	Height	Total Height
	151mm	98mm	95mm	101mm
Approx. Weight	3.70Kg			
Internal Resistance	Fully Charged at 25°C 0.16 Ohm			
Self Discharge	3% of capacity declined per month at 25°C			
Capacity Affected by Temperature	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage (25°C)	Cycle Use		Float Use	
	14.0 - 15.0V (-24mV/C), max. Current: 3.6A		13.6 - 13.8V (-18mV/C)	

Construction

Component ——— Raw material
 Positive ——— Lead dioxide
 Negative ——— Lead
 Container ——— ABS (Flame Retardent optional)
 Cover ——— ABS (Flame Retardent optional)

Sealed and maintenance free option

Sealant ——— Epoxy Resin
 Safety Valve ——— EPDR
 Terminal ——— Copper
 Separator ——— Fibre Glass
 Electrolyte ——— Sulphuric acid

Non-spillable construction design




UKAI BILBAO
 Ribera Elorrieta 7C
 48015 Bilbao
 Teléfono: 94 474 5252
 Fax: 94 475 9710
 e-mail: ukai@ukai.com


UKAI BARCELONA
 C/ Orient 78-84 1º 7ª (Ed. Inbisa)
 08011 St. Cugat del Vallés
 Teléfono: 93 284 0898
 Fax: 93 210 6765
 e-mail: ukaibcn@ukai.com

UKAI MADRID
 Avda Andalucía 2, 2ª planta local 211
 28702 San Sebastián de los Reyes
 Teléfono: 91 659 0328
 Fax: 91 659 0558
 e-mail: ukaimad@ukai.com


Charge Characteristic

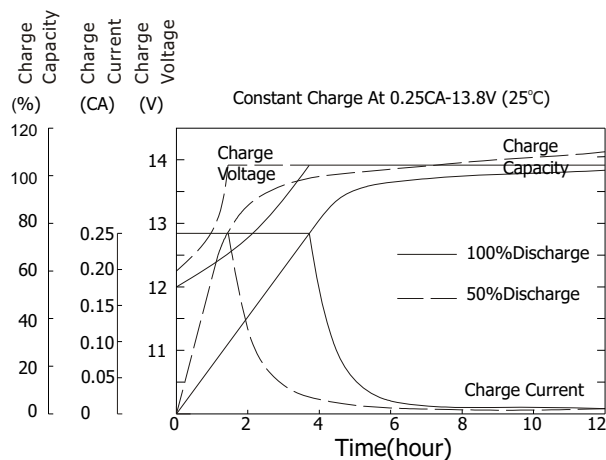


Discharge Characteristic 25°C

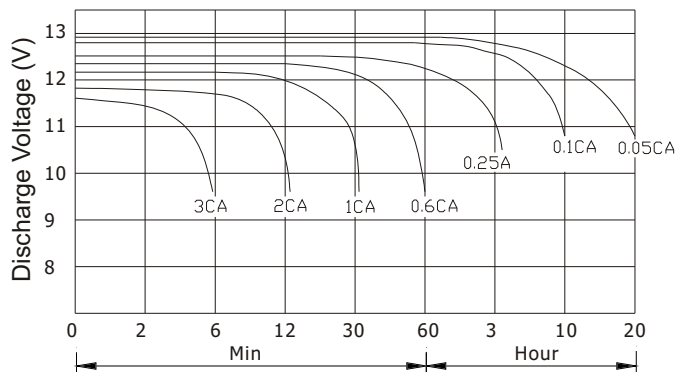

Relationship of OCV and state of charge

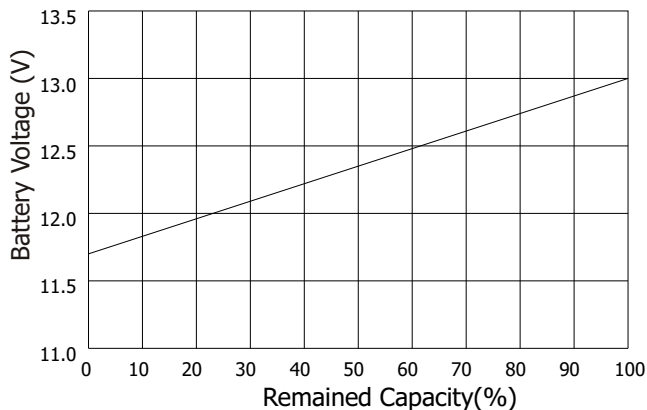

Self Discharge Characteristics

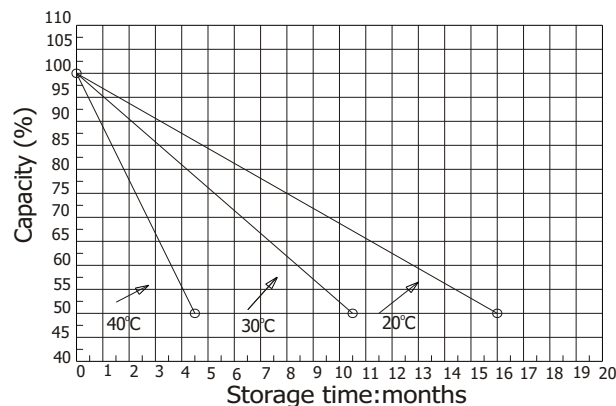

Constant Current Discharge Ratings - amperes at 25°C

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60 V	47.3	29.0	22.0	13.4	7.20	3.35	2.21	1.22	0.67
1.67 V	43.9	27.8	21.3	12.9	7.13	3.17	2.16	1.20	0.66
1.70 V	40.6	26.6	20.7	11.7	6.86	3.00	2.11	1.16	0.64
1.75 V	40.1	25.9	20.0	11.1	6.72	2.93	2.04	1.14	0.61
1.80 V	35.5	24.7	18.2	10.3	6.26	2.86	2.02	1.13	0.60
1.85 V	31.4	23.5	16.3	9.43	6.07	2.81	2.02	0.89	0.60

Constant Power Discharge Ratings - watts at 25°C

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60 V	96.0	62.4	48.0	27.8	15.6	6.07	4.13	2.32	1.22
1.67 V	92.9	61.0	47.3	27.4	15.4	6.05	4.12	2.32	1.22
1.70 V	89.0	60.0	46.1	26.9	15.3	6.00	4.11	2.31	1.20
1.75 V	83.8	57.6	44.6	26.2	15.0	5.95	4.08	2.31	1.20
1.80 V	72.7	53.3	42.7	25.4	14.5	5.83	4.03	2.28	1.18
1.85 V	68.6	49.4	40.8	24.2	14.2	5.74	3.98	2.28	1.18