



EVX series

EVX 1272 12V 7.2AH



Ribera Elorrieta, 7C  
48015 - Bilbao  
Teléfono: 94 474 52 52  
Fax: 94 475 97 10  
E-mail: ukai@ukai.com

**Valve Regulated Lead Acid Battery**

Maintenance-Free Sealed Lead Acid Battery.  
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

**Design for Cyclic Applications**

**【Design Life】**

400 cycles @ 100%DOD at 25°C  
1800 cycles @ 30%DOD at 25°C

**【Operating Temperature Range】**

Nominal Operating Temperature : 25°C (77°F)  
Discharge : -15°C ~ 50°C (5°F~122°F)  
Charge: -15°C ~ 40°C (5°F~104°F)  
Storage: -15°C ~ 40°C (5°F~104°F)

**【Equalization Charging Voltage】**


14.4 ~ 15.0 VDC/Unit at 25°C (77°F)

**【Self Discharge】**

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F);  
Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

**Specification**

Nominal Voltage	12V (6 cells per unit)		
Nominal Capacity	7.2 AH @20HR-rate to 1.75V per PCS @25°C (77°F)		
Weight	Approx. 2.55 Kg (5.62 lbs)		
Maximum Discharge Current	100/130A (5sec)		
Internal Resistance	Approx. 23.9 mΩ		
Short Circuit Current	--		
Maximum Charge Current	2.16A		
Terminal types	F1/F2-Faston Tab187/250		
Terminal hardware Torque	--		
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request		
Dimensions	Length (L)	150.9±2.0 mm	5.94±0.08 inch
	Width (W)	64.8±1.0 mm	2.55±0.04 inch
	Container Height (h)	94.3±1.0 mm	3.71±0.04 inch
	Overall Height (H)	98.6±1.0 mm	3.88±0.06 inch

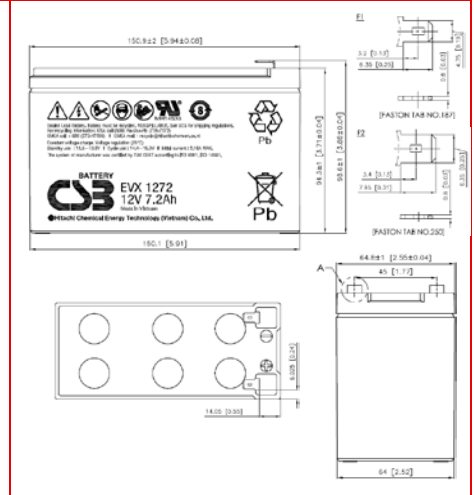

**Constant Current Discharge Characteristics Unit: A (25°C, 77°F)**

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.67V	7.01	5.19	4.19	3.08	2.49	1.79	1.44	1.20	1.04	0.82	0.68	0.40
1.70V	6.79	5.01	4.04	2.98	2.40	1.73	1.39	1.16	1.00	0.79	0.65	0.38
1.75V	6.57	4.85	3.91	2.89	2.34	1.68	1.36	1.13	0.97	0.77	0.64	0.38
1.80V	6.38	4.71	3.80	2.81	2.27	1.63	1.32	1.10	0.95	0.75	0.62	0.36
1.83V	6.20	4.58	3.70	2.73	2.19	1.58	1.28	1.07	0.92	0.72	0.60	0.35
1.85V	6.00	4.44	3.58	2.65	2.13	1.53	1.24	1.04	0.89	0.70	0.58	0.33

**Constant Power Discharge Characteristics Unit: W (25°C, 77°F)**

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.67V	84.1	62.3	50.3	37.0	29.6	21.5	17.3	14.4	12.4	9.81	8.20	4.53
1.70V	81.4	60.3	48.8	35.8	28.8	20.9	16.8	14.0	12.0	9.50	7.86	4.35
1.75V	79.2	58.6	47.3	34.8	27.9	20.2	16.3	13.6	11.7	9.24	7.72	4.27
1.80V	76.8	56.8	45.9	33.8	27.1	19.6	15.8	13.2	11.4	8.96	7.49	4.14
1.83V	74.4	55.0	44.4	32.7	26.2	19.0	15.3	12.8	11.0	8.67	7.25	4.00
1.85V	72.0	53.3	43.0	31.7	25.4	18.4	14.8	12.4	10.7	8.39	7.02	3.87

Please refer to the official site for the latest rating confirmation. URL: [www.csb-battery.com](http://www.csb-battery.com)

Issued: 161101

**Sales Offices**

日立化成能源科技股份有限公司  
Hitachi Chemical Energy Technology Co., Ltd.

**BUSINESS HEADQUARTERS**

Tel: +886-2-2880-5600  
Fax: +866-2-2888-3300

**USA OFFICE**

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)  
Fax: +1-817-244-4445

**SHENZHEN OFFICE (CHINA)**

Tel: +86-755-8831-6488, 8831-6775  
Fax: +86-755-8831-6075

**EUROPE (EMEA) OFFICE**

Tel: +31(0)180-418-140  
Fax: +31(0)180-418-327

**SHANGHAI OFFICE (CHINA)**

Tel: +86-21-5046-1622, 5046-0833  
Fax: +86-21-5046-1046

**TAIPEI OFFICE**

Tel: +886-2-2880-5600  
Fax: +866-2-2888-3300

**BEIJING OFFICE (CHINA)**

Tel: +86-10-5820-5336, 5820-5338  
Fax: +86-10-5820-3053

Recognized under UL 1989,  
and certified by ISO 9001, 14001.

