

# top view neon NL-1010VL-BX



Flame Protected



Resistant to solvents



Saltwater resistant



UV resistant




IP67 Immersion Protection



LK08 protection



Beam angle 120°





Min. bending diameter Ø100mm

## BRIEF PARAMETERS

Forward Voltage:	24VDC
Power:	<10W/m
Led color:	White
Wave length:	2700-6500K
Width:	10mm
Thickness:	10mm
Min. Bending diameter	≥100mm
IP grade	IP67 / IP65 (Depending on the connectors used: factory or mounted)

**TOP VIEW**  
Vertical Bending  
Vertical bending against the light surface




## PRODUCT FEATURES

- Freely cutting Neon flex, greater flexibility to customized length.
- Led strip inside: 1600led/m SMD2835.
- Dimension: 10x10mm.
- Finished product: SDCM<3, better color consistency.
- Special design, still works however inner FPC board damaged in one or more pieces.
- With matte treatment, smooth surface and resistant to dust.
- Same width end cap as the strip.
- Power cord with 3 directions: Straight powered, side powered, back powered.
- Constant voltage design, Max.run (single end feed): 10m/pcs, freely cutting with the fast connectors.


## OPTICAL PARAMETER

Item	Color/CCT	Lumen/m	Power/m	Voltage	Light efficiency	CRI (Ra)	Max. Run (single end feed)	Minimum section	Color tolerance
NL-1010VL-BH	2700K	410Lm	<10W	24VDC	41Lm/W	90+	10m	Freely cutting	SDCM<3
NL-1010VL-BC	3000K	450Lm	<10W	24VDC	45Lm/W	90+	10m	Freely cutting	SDCM<3
NL-1010VL-BCN	3500K	470Lm	<10W	24VDC	47Lm/W	90+	10m	Freely cutting	SDCM<3
NL-1010VL-BN	4000K	490Lm	<10W	24VDC	49Lm/W	90+	10m	Freely cutting	SDCM<3
NL-1010VL-BF	6500K	490Lm	<10W	24VDC	49Lm/W	90+	10m	Freely cutting	SDCM<3

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

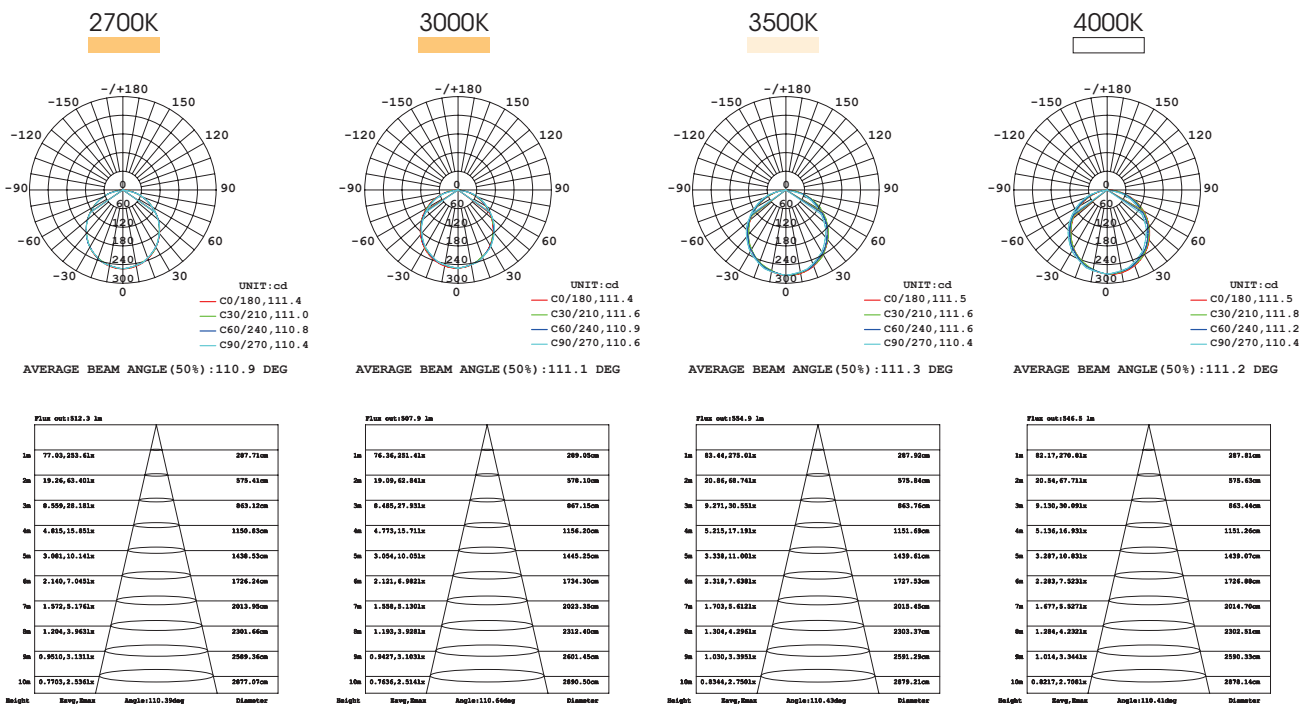


**DIMENSIONS AND OUTLET DIRECTION**  
Unit:mm

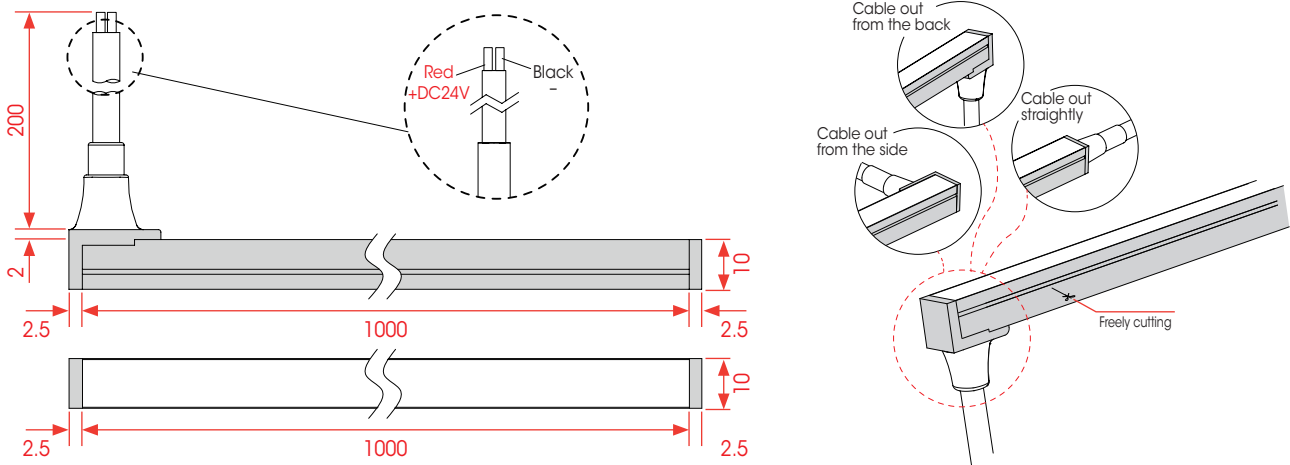


**Notice:** End cap with the same width as the tape light.


**CONNECTING ACCESSORIES**  
(IP65)

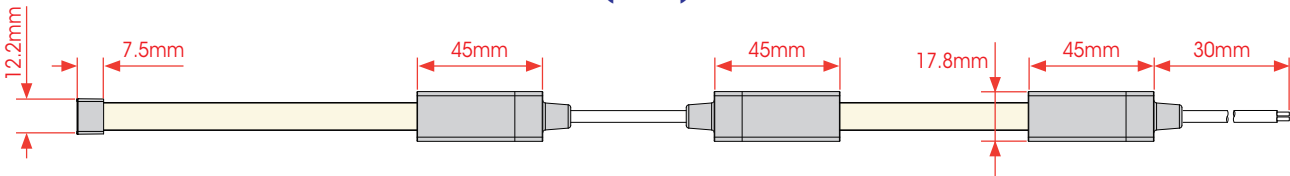

END CAP (IP65, with silicon glue)




JUMPER CONNECTOR-STRAIGHT

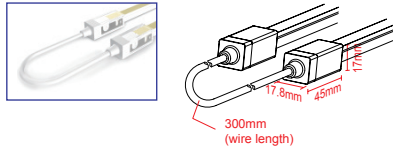

END-STRAIGHT



END CAP (IP65, without glue)




END-SIDE LEFT



END-SIDE RIGHT




END-BOTTOM



## INSTALLATION ACCESORIES


Aluminium Buckle  
12x12.5x25mm




Screw  
15x3.5mm




Lenght	1000mm
Buckle	4pcs
Screw	4pcs




Aluminium profile  
12x12.5x2440mm




Screw  
15x3.5mm



Lenght	2440mm
Screw	10pcs




## PACKAGING

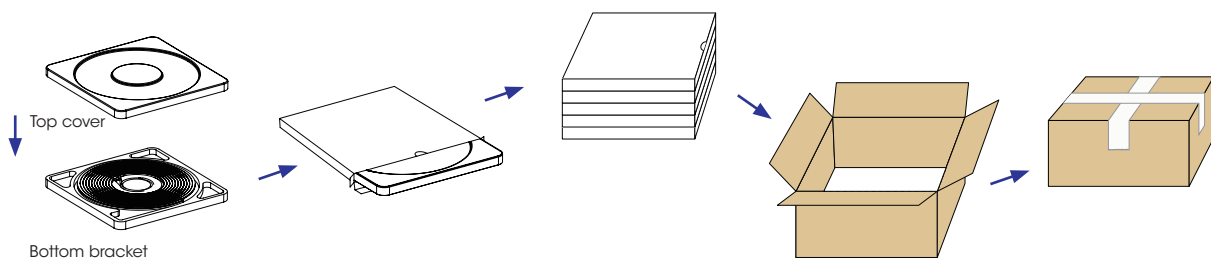


Light length	Plastic box dimension	White box dimension	Numbers of white box	Carton dimension
1m	275x275x30.5mm	275x35x275mm	40pcs	570x570x380mm
5m	385x385x35mm	390x40x390mm	10pcs	410x410x430mm
10m	480x480x35mm	485x40x485mm	5pcs	505x505x230mm

## NEON LED STRIP INSTRUCTION AND CAUTION


### Light Profile



### Correct bending way





Face to the light surface  
fold the strip, the minimum  
bending diameter is 100mm.




Light surface upwards, the  
strip is bendable to right or  
left naturally, the minimum  
bending diameter is 100mm.


### Bending direction Profile




### Incorrect bending way



Face to the side surface,  
(as the picture shows)  
Do not bend downward to  
damage the strip.



Face to the side surface,  
(as the picture shows)  
Do not bend upward to  
damage the strip.



(as the picture shows)  
please do not twist  
the strip, or it will be  
damaged.