

UL 1.3 - 12

12V 1.3AH

STANDBY


Ultrace//[®]

'Quality in Every Language'



Image



Terminal Type

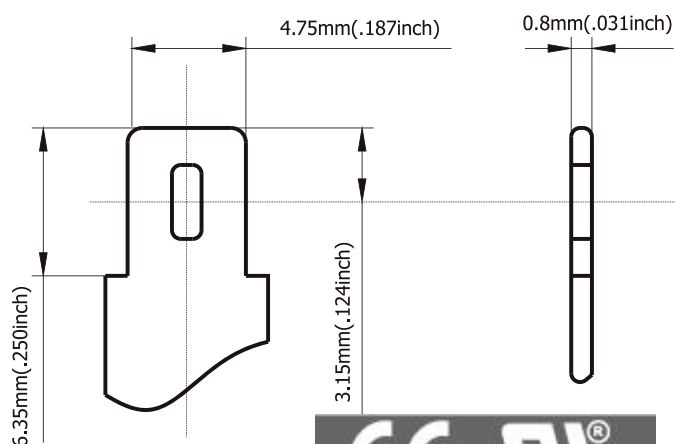

Dimensions

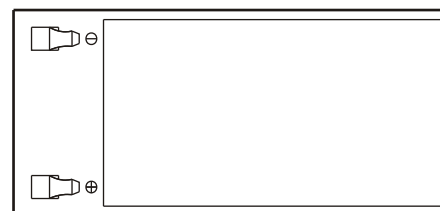

Specifications

Battery Model	UL 1.3 - 12			
Designed Floating Life	5 Years			
Capacity (25°C)	20HR (0.065A, 1.75V)	10HR (0.124A, 1.75V)	5HR (0.221A, 1.75V)	1HR (0.78A, 1.55V)
	1.3AH	1.24AH	1.105AH	0.78AH
Dimensions	Length	Width	Height	Total Height
	97mm	43mm	52mm	58mm
Approx. Weight	0.58Kg			
Internal Resistance	Fully Charged at 25°C 0.095 Ohm			
Self Discharge	3% of capacity declined per month at 25°C			
Capacity Affected by Temperature	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage (25°C)	Cycle Use		Float Use	
	14.0 - 15.0V (-24mV/C), max. Current: 0.39A		13.6 - 13.8V (-18mV/C)	

Construction

Component — Raw material
 Positive — Lead dioxide
 Negative — Lead
 Container — ABS (Flame Retardent optional)
 Cover — ABS (Flame Retardent optional)

Sealed and maintenance free option

Sealant — Epoxy Resin
 Safety Valve — EPDR
 Terminal — Copper
 Separator — Fibre Glass
 Electrolyte — Sulphuric acid

Non-spillable construction design



UKAI BILBAO
 Ribera Elorrieta 7C
 48015 Bilbao
 Teléfono: 94 474 5252
 Fax: 94 475 9710
 e-mail: ukai@ukai.com

UKAI BARCELONA
 Avda. Vallcarca 74-76
 08023 Barcelona
 Teléfono: 93 284 0898
 Fax: 93 210 6765
 e-mail: ukaibcn@ukai.com

UKAI MADRID
 Avda Andalucía 2, 2ª planta local 211
 28700 San Sebastián de los Reyes
 Teléfono: 91 659 0328
 Fax: 91 659 0558
 e-mail: ukaimad@ukai.com

UL 1.3 - 12


12V 1.3AH

STANDBY


Ultracell®

'Quality in Every Language'


Charge Characteristic

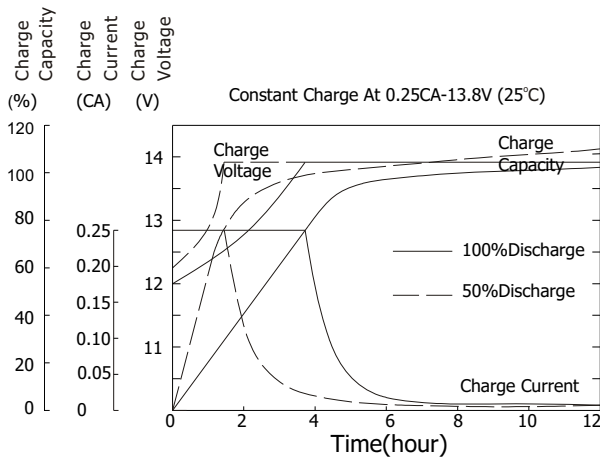


Discharge Characteristic 25°C

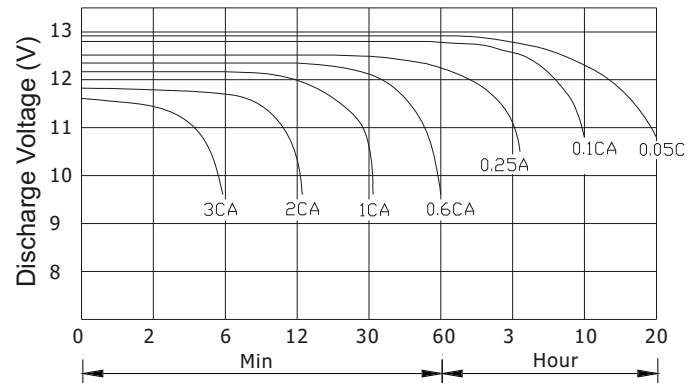

Relationship of OCV and state of charge

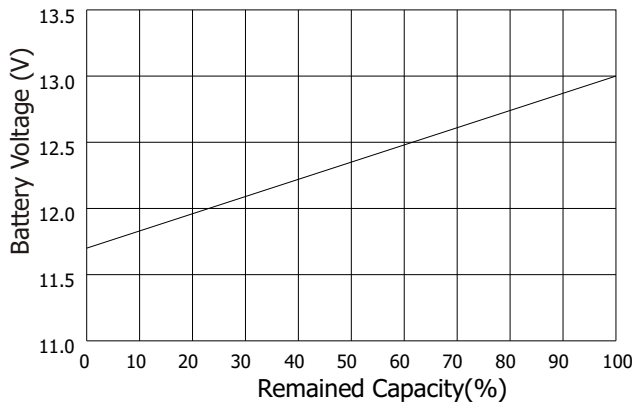

Self Discharge Characteristics

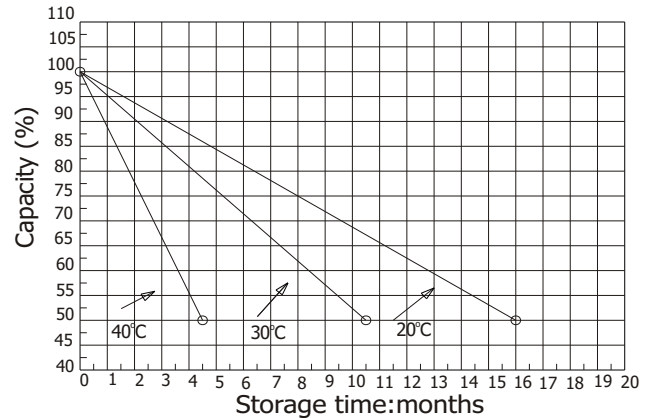

Constant Current Discharge Ratings - amperes at 25°C

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60 V	5.08	3.16	2.39	1.45	0.78	0.40	0.25	0.14	0.07
1.67 V	4.78	3.01	2.28	1.40	0.78	0.37	0.24	0.14	0.07
1.70 V	4.37	2.90	2.25	1.27	0.77	0.33	0.23	0.14	0.07
1.75 V	4.30	2.88	2.17	1.22	0.74	0.32	0.22	0.13	0.07
1.80 V	3.82	2.68	1.97	1.14	0.73	0.31	0.22	0.13	0.07
1.85 V	3.37	2.54	1.76	1.11	0.73	0.31	0.20	0.13	0.06

Constant Power Discharge Ratings - watts at 25°C

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60 V	9.36	5.72	4.94	2.99	1.67	0.67	0.45	0.26	0.15
1.67 V	9.10	6.37	4.81	2.96	1.65	0.67	0.45	0.25	0.14
1.70 V	8.84	6.24	4.68	2.93	1.64	0.65	0.45	0.25	0.14
1.75 V	8.45	6.04	4.55	2.86	1.60	0.64	0.44	0.25	0.14
1.80 V	8.06	5.72	3.29	2.73	1.56	0.62	0.43	0.24	0.13
1.85 V	7.75	5.47	3.09	2.62	1.51	0.62	0.43	0.24	0.13



UKAI BILBAO
 Ribera Elorrieta 7C
 48015 Bilbao
 Teléfono: 94 474 5252
 Fax: 94 475 9710
 e-mail: ukai@ukai.com

UKAI BARCELONA
 Avda. Vallcarca 74-76
 08023 Barcelona
 Teléfono: 93 284 0898
 Fax: 93 210 6765
 e-mail: ukaibcn@ukai.com

UKAI MADRID
 Avda Andalucía 2, 2ª planta local 211
 28700 San Sebastián de los Reyes
 Teléfono: 91 659 0328
 Fax: 91 659 0558
 e-mail: ukaimad@ukai.com