



Yuasa Ficha Técnica

Yuasa YBX3078 - YBX3000 SMF Batteries

Rendimiento

Tensión	12V
Capacidad (20 horas)	60Ah
Capacidad Arranque Amperios (EN1)	550A

Dimensiones

Largo	243mm
Ancho	175mm
Alto	190mm

Peso

Peso con Acido	14.8kg
Peso Sin acido	-
Volumen de acido	-

Características

Tipo de Caja	L2 DIN
Borne	1
Fijación	B3
Indicador de Carga	✓
Asas	✓
Respiradero	✓
Sellada	SMF Double Lid



Tecnología

Regulador gases	✓
Tecnología	Ca/Ca
Separadores	PE
VDA Roll Over Test	✓
Carga recomendada	4A

Ribera Elorrieta, 7C
48015 - Bilbao
Teléfono: 94 474 52 52
Fax: 94 475 97 10
E-mail: ukai@ukai.com


Tipo de terminal

Esquema

Fijación

T1

Standard DIN Post

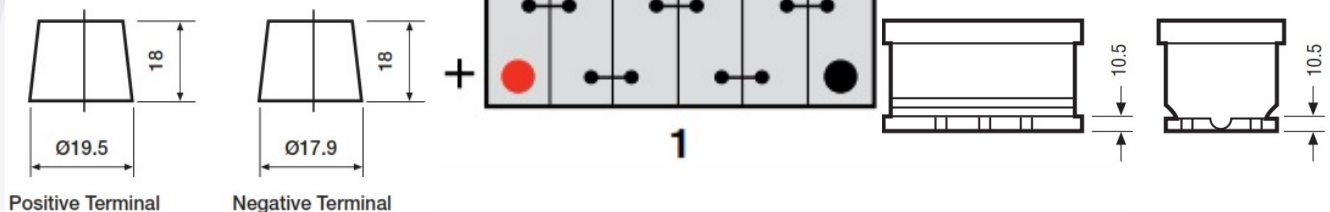

Fecha de emisión: 07/05/2018 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3078 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	60Ah
Cold Cranking Amps (EN1)	550A

Dimensions

Length	243mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	14.8kg
Dry Weight	-
Acid Volume	-

Container Features

Case Type	L2 DIN
Cell Layout	1
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid



Ribera Elorrieta, 7C
48015 - Bilbao
Teléfono: 94 474 52 52
Fax: 94 475 97 10
E-mail: ukai@ukai.com


Technology

Flame Arrestor	
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A


Terminal Type

T1


Standard DIN Post

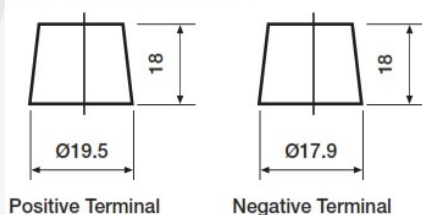

Cell Assembly Layout

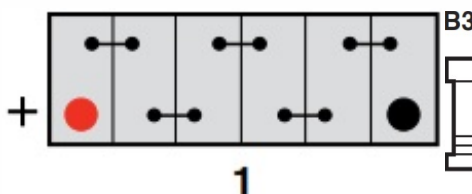

Battery Hold-down

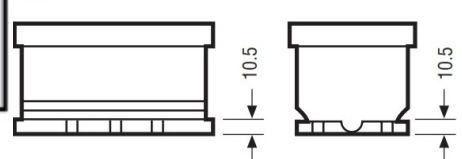

Data Sheet generated on 07/05/2018 - E&OE