

DRX-15-24T

15W constant voltage style power supply



Scope

This product for the LED driver, the product operational factors is the constant voltage model.

Electrical Specifications

	Item	Technical Norm
	Max. Output Wattage	15W
Input	Rated Input Voltage	220-240VAC
	Range of input voltage	180-264VAC
	Frequency(Hz)	50Hz
	Power Factor	NC
	Current	0.3A MAX. @Full Load ,100VAC
	Start-up time	<0.5S for ERP @Full Load
	Inrush Current	40A MAX. @Full Load, 240VAC
	Unload Power Consumption	≤0.5W
Output	Unload voltage	25.3VDC MAX.
	Load Voltage range	NC
	Constant Voltage	24V
	Voltage Accuracy	±5% @220-240VAC
	Voltage Regulation	≤3%@Full Load
	Hold-up Time	<1s max, Io=0mA
	Efficiency in full load	≥80%@Full Load ,240VAC
	Ripple	<120mVp-p @Full Load , 240VAC
Dimming	Dimmable or not	NA
	Dimming mode	NA
	Dimming current range	NA

DRX-15-24T

15W constant voltage style power supply

Electrical Specifications

	Item	Technical Norm
Protección	Over Load Protection	105-120%
		Protection type: Auto Restore
	Over Voltage Protection	>28VDC
		Protection type: Auto Restore
Short circuit Protection	Protection type: Auto Restore	
	Over Temperature protection	Protection type: Auto Restore
Hi-pot	Input-Output (V.AC)	3000V/5mA/1min
	Input-FG (V.AC)	NA
	Output-FG (V.AC)	NA
	Leakage Current	<0.5mA (240VAC)
Isolation resistance	Input-Output (V.AC)	≥10MΩ@500VDC
	Input-FG(V.AC)	NA
	Output-FG (V.AC)	NA
Environment / Life span	Operating Temperature	-10°C...+40°C
	tc	85°C
	Storage Temperature	-20°C...+60°C
	Humidity	20%-90%RH
	Life time	>30,000h @50°C
	HSF requirement	RoHS
Feature	Dimension	160.5*30*16 (LxWxH) mm
Safety & EMC	Approval	CE
	Safety standards	EN 61347-1;
	EMI	EN61347-1; EN61000-3-2 Class C EN61000-3-3
	EMS	EN61547; EN 61000-4-2 —8KV; 4KV; Performance Criteria B EN 61000-4-5 —1000V; Performance Criteria C

Note:

All parameters NOT specially mentioned are measured at rated input or max rated input, and 25°C of ambient temperature.

Mechanical Requirement



Enclosure: The power supply size: L160.5 x W30 x H16mm.

DRX-15-24T


15W constant voltage style power supply

Connecting Line Dimension

Connecting line type	
AC Input	
DC Output	

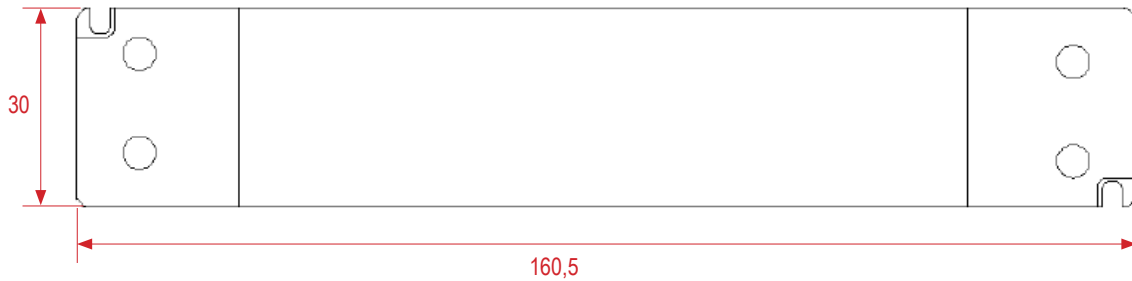

Label

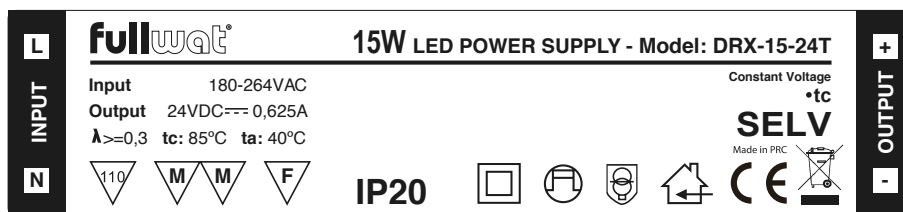

Packing

Internal box: 370L*225W*165H
Outside box: 380L*280W*185H(mm)
Quantity:100PCS/CTN

