

## Specifications

Nominal Voltage (V)		6	
Nominal Capacity (AH)		1.3	
Dimensions	Length	97 mm	3.82 inch
	Width	24 mm	0.94 inch
	Height	52 mm	2.05 inch
	Total Height	58 mm	2.28 inch
Approx. Weight		0.29 kgs	0.64 lbs
Standard Terminals Case Material		Faston Tab 187 ABS UL 94-HB	


## Characteristics

Capacity	20 hour rate	0.06 A	1.30 Ah
	10 hour rate	0.12 A	1.19 Ah
	5 hour rate	0.20 A	1.03 Ah
	1 hour rate	0.89 A	0.89 Ah
	15 Min Rate	2.36 A	0.59 Ah
Internal Resistance		45 mΩ	
Max. Discharge Current ( 5 sec )		18 A	
Constant Voltage Charge Method	Max. Charge Current	0.4 A	
	Standby Use	2.25 - 2.30 V /Cell	
	Cycle Use	2.40 - 2.50 V /Cell	
Operating Temperature Range	Discharge:	-15 ~ 50 °C ( 5 ~ 122 °F )	
	Charge:	-15 ~ 40 °C ( 5 ~ 104 °F )	
	Storage:	-15 ~ 40 °C ( 5 ~ 104 °F )	
Temperature coefficient	For standby use:	-3.3mV / °C /Cell	
	For cycle use:	-5.0mV / °C /Cell	
Self discharge 25°C (77°F)	After 3-month	91%	
	After 6-month	82%	
	After 12-month	64%	
Temperature dependency of Capacity	40 °C (104 °F)	102%	
	25 °C (77 °F)	100%	
	0 °C (32 °F)	85%	
	-15 °C (5 °F)	65%	

## Discharge Voltage vs Discharge Current

Final Voltage V/Cell	1.75	1.70	1.60	1.30
Discharge Current (A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C

## Dimensions

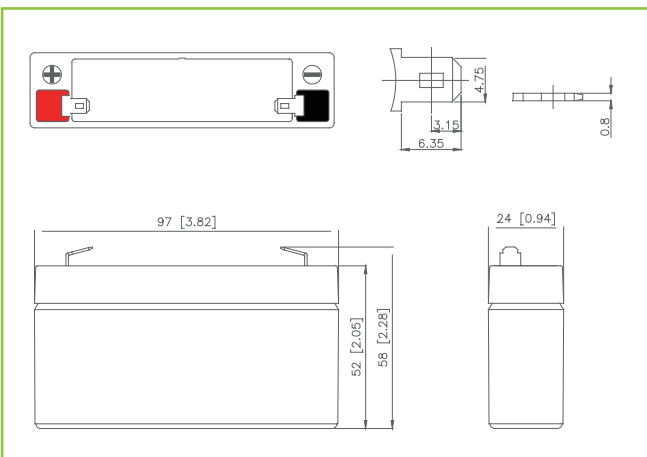

**Ukai Bilbao**  
Ribera Elorrieta,7C  
48015 - Bilbao  
Tlfno: 94 474 52 52  
Fax 94 475 97 10  
ukai@ukai.com

**Delegación Barcelona**  
Tlfno: 93 284 08 98  
Fax 93 210 67 65  
ukaibcn@ukai.com

**Delegación Madrid**  
Tlfno: 91 659 03 28  
Fax 91 659 05 58  
ukaimad@ukai.com

**Delegación Galicia**  
Tlfno: 651 70 49 21  
ukaiglc@ukai.com




# LV 1.3-6

LV 1.3-6 VRLA (valve-regulated lead acid) battery is designed for general purpose application with 5 years standby life at 25°C. This battery is rechargeable, highly-efficient, leak-proof and maintenance-free.

LivEn is ISO9001 and UL certified for quality assurance.




## Terminal Voltage (V) and Discharge Time

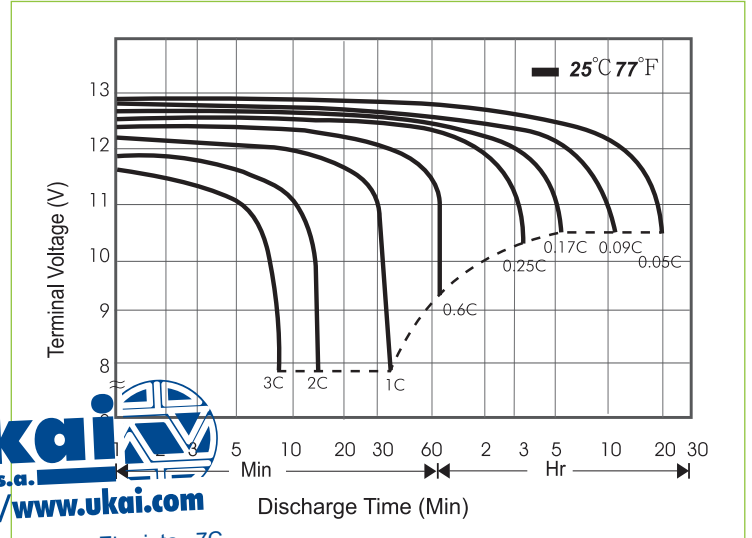

Ribera Elorrieta, 7C  
48015 - Bilbao  
Telefono: 94 474 52 52  
Fax: 94 475 97 10  
E-mail: ukai@ukai.com

## Battery Voltage and Charge Time for Standby Use

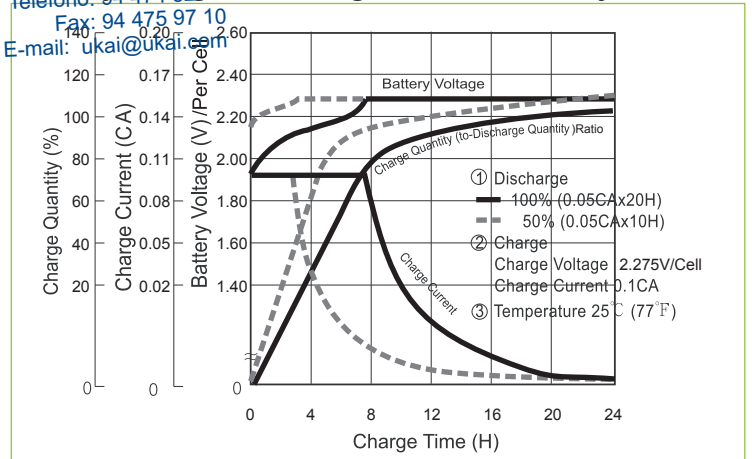

## Cycle Service Life

