

UL 0.8 - 12

12V 0.8AH

STANDBY


Ultracell®

'Quality in Every Language'


Image



Terminal Type

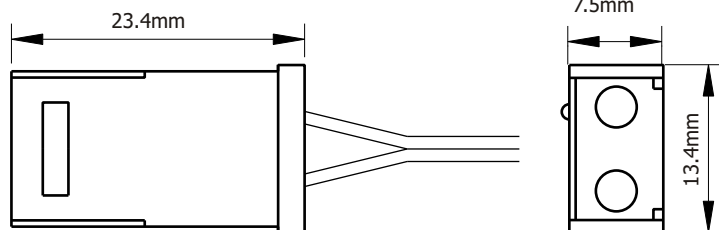

Dimensions

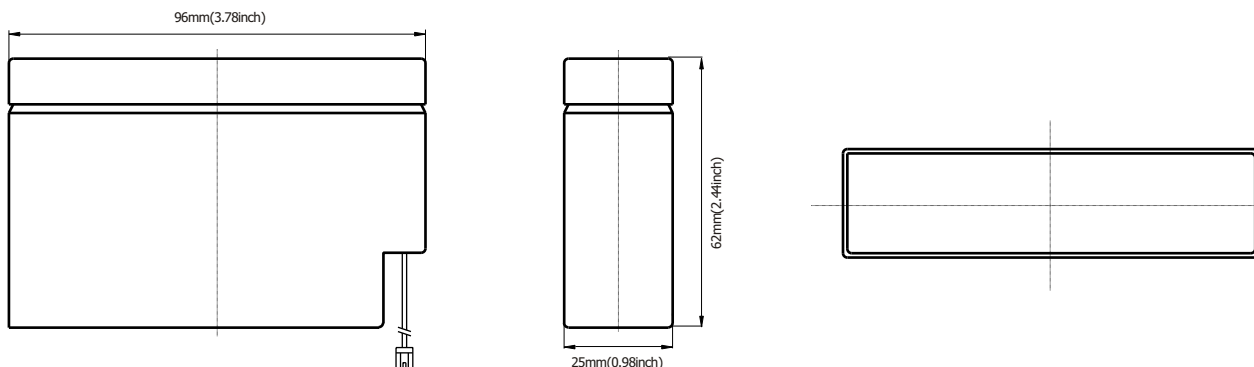

Specifications

Battery Model	UL 0.8 - 12			
Designed Floating Life	5 Years			
Capacity (25°C)	20HR (0.04A, 1.75V)	10HR (0.076A, 1.75V)	5HR (0.136A, 1.75V)	1HR (0.48A, 1.55V)
	0.8AH	0.76AH	0.68AH	0.48AH
Dimensions	Length	Width	Height	Total Height
	96mm	25mm	62mm	62mm
Approx. Weight	0.36Kg			
Internal Resistance	Fully Charged at 25°C 0.26 Ohm			
Self Discharge	3% of capacity declined per month at 25°C			
Capacity Affected by Temperature	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage (25°C)	Cycle Use		Float Use	
	14.0 - 15.0V (-24mV/C), max. Current: 0.24A		13.6 - 13.8V (-18mV/C)	

Construction

Component	Raw material	Sealant	Epoxy Resin
Positive	Lead dioxide	Safety Valve	EPDR
Negative	Lead	Terminal	Copper
Container	ABS (Flame Retardent optional)	Separator	Fibre Glass
Cover	ABS (Flame Retardent optional)	Electrolyte	Sulphuric acid

Sealed and maintenance free option

Non-spillable construction design



UKAI BILBAO
Ribera Elorrieta 7C
48015 Bilbao
Teléfono: 94 474 5252
Fax: 94 475 9710
e-mail: ukai@ukai.com

UKAI BARCELONA
Avda. Vallcarca 74-76
08023 Barcelona
Teléfono: 93 284 0898
Fax: 93 210 6765
e-mail: ukaibcn@ukai.com

UKAI MADRID
Avda Andalucía 2, 2ª planta local 211
28700 San Sebastián de los Reyes
Teléfono: 91 659 0328
Fax: 91 659 0558
e-mail: ukaimad@ukai.com

UL 0.8 - 12


12V 0.8AH

STANDBY


Ultracell®

'Quality in Every Language'


Charge Characteristic

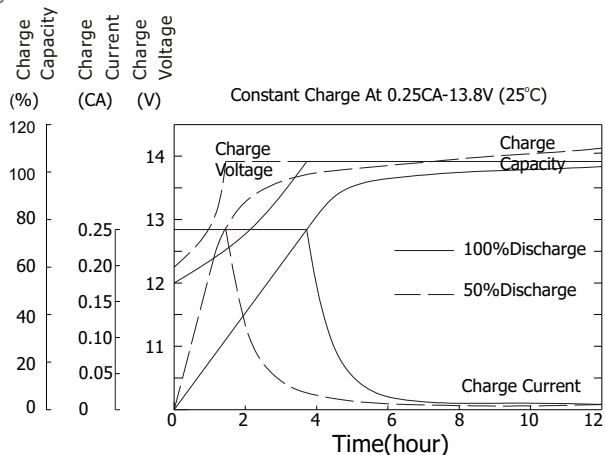


Discharge Characteristic 25°C

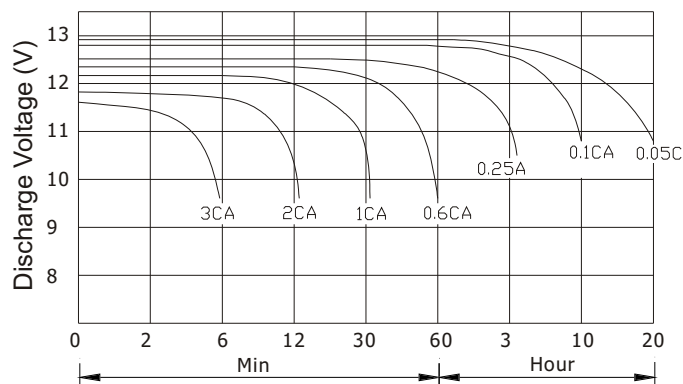

Relationship of OCV and state of charge

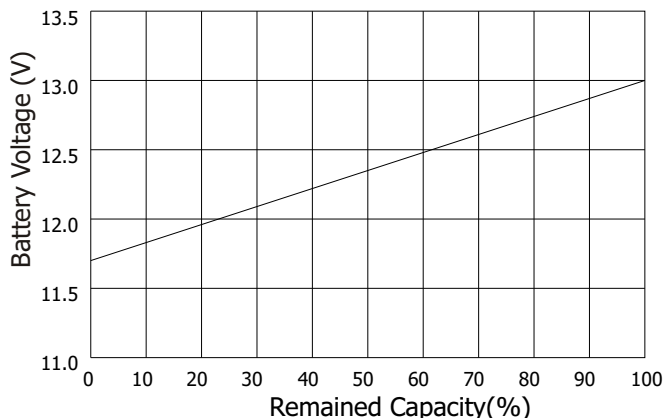

Self Discharge Characteristics

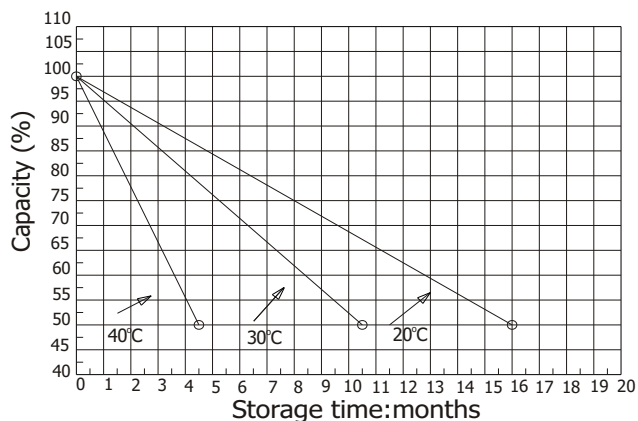

Constant Current Discharge Ratings - amperes at 25°C

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60 V	3.15	1.94	1.47	0.90	0.48	0.24	0.15	0.09	0.04
1.67 V	2.94	1.85	1.42	0.88	0.47	0.23	0.15	0.08	0.04
1.70 V	2.70	1.79	1.38	0.82	0.46	0.20	0.15	0.08	0.04
1.75 V	2.65	1.72	1.34	0.73	0.46	0.19	0.14	0.08	0.04
1.80 V	2.34	1.65	1.22	0.69	0.45	0.19	0.14	0.08	0.04
1.85 V	2.10	1.57	1.10	0.64	0.45	0.19	0.13	0.08	0.04

Constant Power Discharge Ratings - watts at 25°C

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60 V	5.90	4.20	3.24	1.84	1.03	0.45	0.28	0.17	0.09
1.67 V	5.67	4.10	3.10	1.83	1.01	0.44	0.28	0.16	0.09
1.70 V	5.57	4.02	3.02	1.80	0.98	0.43	0.28	0.16	0.09
1.75 V	5.42	3.88	3.01	1.76	0.95	0.43	0.27	0.15	0.08
1.80 V	5.23	3.60	2.78	1.68	0.93	0.39	0.27	0.15	0.08
1.85 V	4.81	2.52	1.63	1.53	0.92	0.39	0.26	0.15	0.08



UKAI BILBAO
 Ribera Elorrieta 7C
 48015 Bilbao
 Teléfono: 94 474 5252
 Fax: 94 475 9710
 e-mail: ukai@ukai.com

UKAI BARCELONA
 Avda. Vallcarca 74-76
 08023 Barcelona
 Teléfono: 93 284 0898
 Fax: 93 210 6765
 e-mail: ukaibcn@ukai.com

UKAI MADRID
 Avda Andalucía 2, 2ª planta local 211
 28700 San Sebastián de los Reyes
 Teléfono: 91 659 0328
 Fax: 91 659 0558
 e-mail: ukaimad@ukai.com