


K1 Terminal	
No.	Pin Name
1	VSS
2	VDD
3	V0
4	C/D
5	/RD
6	/WR
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	/CE
16	/RST
17	VOUT
18	MD2
19	FS1
20	NC
21	BLA
22	BLK



Wiring Details(Top View)  
Scale=Free

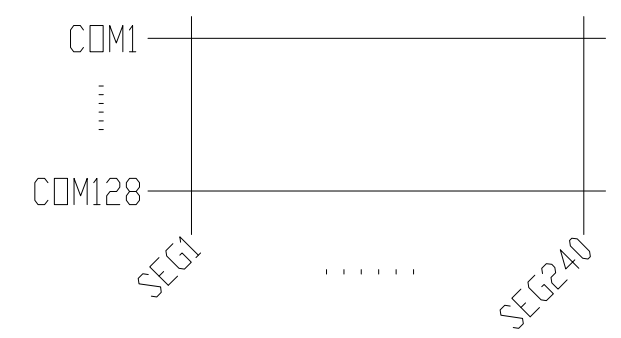


**UKAI BILBAO**  
 Ribera Elorrieta 7C  
 48015 Bilbao  
 Teléfono: 94 474 5252  
 Fax: 94 475 9710  
 e-mail: ukai@ukai.com

**UKAI BARCELONA**  
 C/Orient 78-84 1º 7ª (Ed. Inbisa)  
 08011 St. Cugat del Vallés  
 Teléfono: 93 284 0898  
 Fax: 93 210 6765  
 e-mail: ukaibcn@ukai.com

**UKAI MADRID**  
 Avda Andalucía 2, 2ª planta local 211  
 28702 San Sebastián de los Reyes  
 Teléfono: 91 659 0328  
 Fax: 91 659 0558  
 e-mail: ukaimad@ukai.com

- Note:
- \*1. Display Type : STN, Negative, Transmissive
  - \*2. Viewing Direction : 6H
  - \*3. Duty : 1/128, Bias : 1/12
  - \*4. Backlight Color : White
  - \*5. Backlight Supply : 170mA (5.0V TYP.)
  - \*6. Operating Voltage : 5.0V
  - \*7. Operating Temperature : -20°C~70°C
  - \*8. Storage Temperature : -30°C~80°C
  - \*9. Driver IC : T6963C
  - \*10. An external VR(25K to 50K) must be connected for Contrast Control

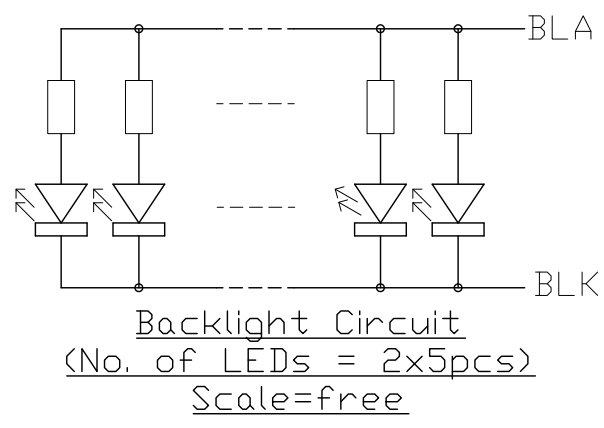

C		
B		
A		
Rev/Note	Date	
Dwg Title	LM240128PFW Outline Dwg	
Dwg No.	MK-002636-1-1	Date 2008-10-07
Scale	Tol. ±0.5	Unit mm Paper Size A3
Approved	Checked	Drawn David Yuan

