



Yuasa Ficha Técnica

Yuasa YBX5019 - YBX5000 Silver High Performance SMF Batteries

Rendimiento

Tensión	12V
Capacidad (20 horas)	100Ah
Capacidad Arranque Amperios (EN1)	900A

Dimensiones


Largo	353mm
Ancho	175mm
Alto	190mm

Peso

Peso con Acido	23.4kg
Peso Sin acido	-
Volumen de acido	-

Características

Tipo de Caja	L5 DIN
Tipo de terminal	T1
Fijación	B3
Indicador de Carga	✓
Asas	✓
Respiradero	✓
Sellada	SMF Double Lid

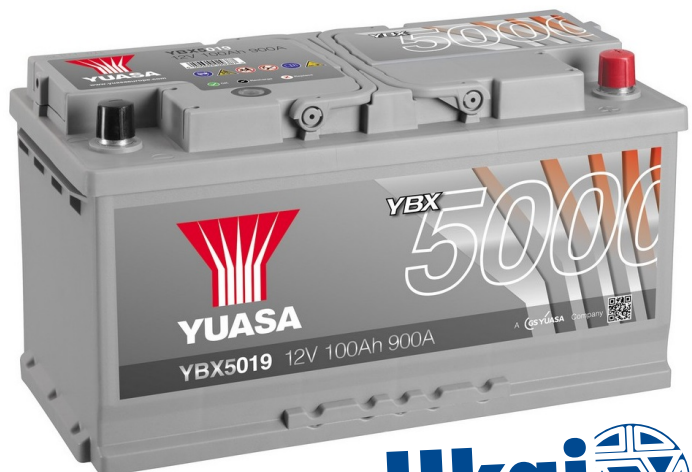

Ukai
s.a.
<http://www.ukai.com>

Ribera Elorrieta, 7C
48015 - Bilbao
Teléfono: 94 474 52 52
Fax: 94 475 97 10
E-mail: ukai@ukai.com

Tecnología

Regulador gases	✓
Tecnología	Ca/Ca
Separadores	PE
VDA Roll Over Test	✓
Carga recomendada	6A



Tipo de terminal

Esquema

Fijación

T1

Standard DIN Post

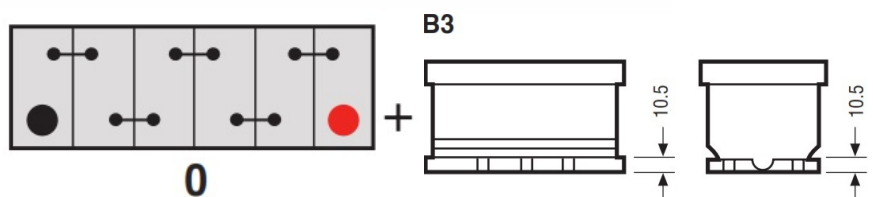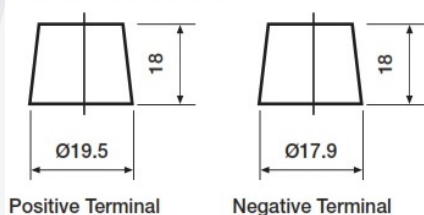

Fecha de emisión: 21/03/2019 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX5019 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	100Ah
Cold Cranking Amps (EN1)	900A

Dimensions


Length	353mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	23.4kg
Dry Weight	-
Acid Volume	-

Container Features

Case Type	L5 DIN
Terminal Type	T1
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid

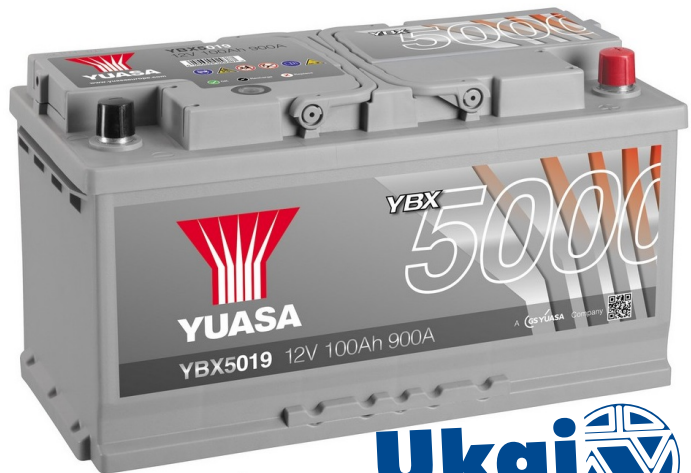

Ribera Elorrieta, 7C
48015 - Bilbao
Teléfono: 94 474 52 52
Fax: 94 475 97 10
E-mail: ukai@ukai.com


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	6A

Terminal Type

T1


Standard DIN Post

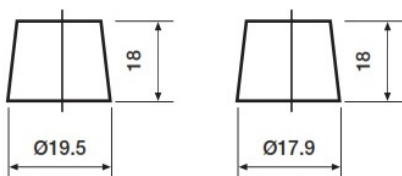


Positive Terminal

Negative Terminal

Cell Assembly Layout

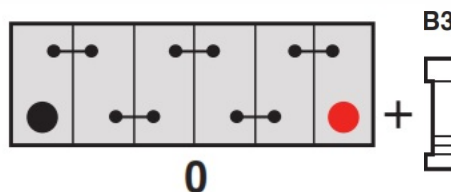

Battery Hold-down

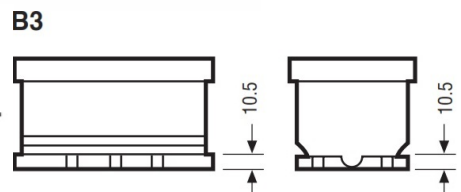

Data Sheet generated on 21/03/2019 - E&OE

