

# UL 1.3 - 6

## 6V 1.3AH

### STANDBY


# Ultracell®

'Quality in Every Language'

Image





Terminal Type

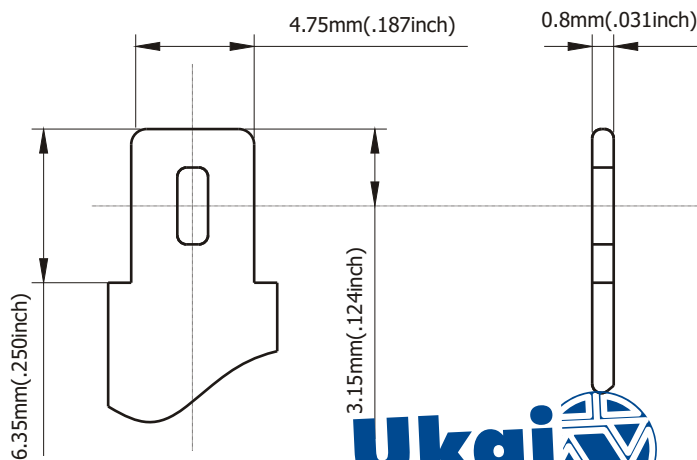

**Ukai**  
s.a.  
<http://www.ukai.com>

Ribera Elorrieta, 7C  
48015 - Bilbao  
Teléfono: 94 474 52 52  
Fax: 94 475 97 10  
E-mail: [ukai@ukai.com](mailto:ukai@ukai.com)

Dimensions

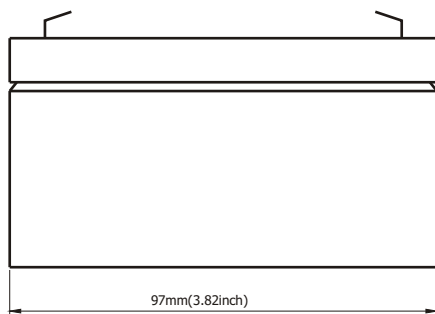

Specifications

Battery Model	UL 1.3 - 6			
Designed Floating Life	5 Years			
Capacity (25°C)	20HR (0.065A, 1.75V)	10HR (0.124A, 1.75V)	5HR (0.221A, 1.75V)	1HR (0.78A, 1.55V)
	1.3AH	1.24AH	1.105AH	0.78AH
Dimensions	Length	Width	Height	Total Height
	97mm	24mm	52mm	58mm
Approx. Weight	0.30Kg			
Internal Resistance	Fully Charged at 25°C 0.050 Ohm			
Self Discharge	3% of capacity declined per month at 25°C			
Capacity Affected by Temperature	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage (25°C)	Cycle Use		Float Use	
	7.2 - 7.5V (-12mV/C), max. Current: 0.39A		6.75 - 6.9V (-9mV/C)	

Construction

Component — Raw material  
 Positive — Lead dioxide  
 Negative — Lead  
 Container — ABS (Flame Retardent optional)  
 Cover — ABS (Flame Retardent optional)

Sealed and maintenance free option

Sealant — Epoxy Resin  
 Safety Valve — EPDR  
 Terminal — Copper  
 Separator — Fibre Glass  
 Electrolyte — Sulphuric acid

Non-spillable construction design

**Ukai**  
s.a.  
<http://www.ukai.com>

**UKAI BILBAO**  
 Ribera Elorrieta 7C  
 48015 Bilbao  
 Teléfono: 94 474 5252  
 Fax: 94 475 9710  
 e-mail: [ukai@ukai.com](mailto:ukai@ukai.com)

**UKAI BARCELONA**  
 C/ Orient 78-84 1º 7ª (Ed. Inbisa)  
 08011 St. Cugat del Vallés  
 Teléfono: 93 284 0898  
 Fax: 93 210 6765  
 e-mail: [ukaibcn@ukai.com](mailto:ukaibcn@ukai.com)

**UKAI MADRID**  
 Avda Andalucía 2, 2ª planta local 211  
 28702 San Sebastián de los Reyes  
 Teléfono: 91 659 0328  
 Fax: 91 659 0558  
 e-mail: [ukaimad@ukai.com](mailto:ukaimad@ukai.com)

# UL 1.3 - 6


## 6V 1.3AH

STANDBY


# Ultracell®

'Quality in Every Language'


### Charge Characteristic

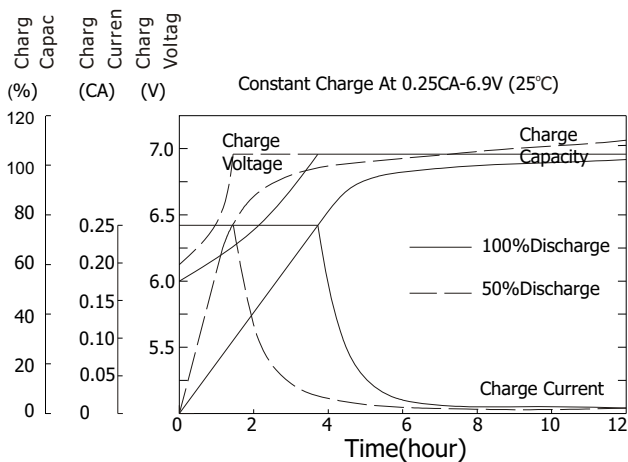


### Discharge Characteristic 25°C

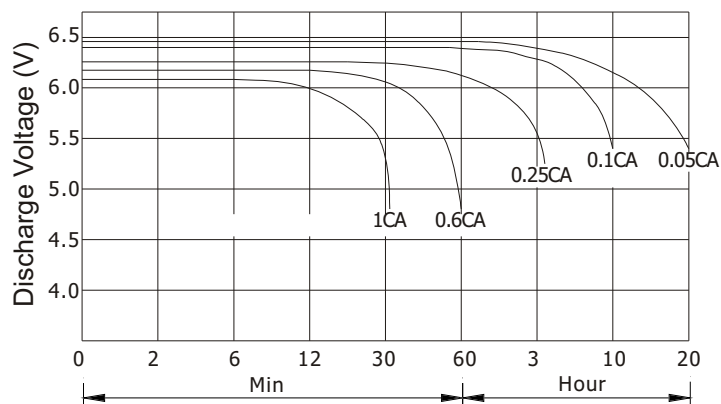

### Relationship of OCV and state of charge

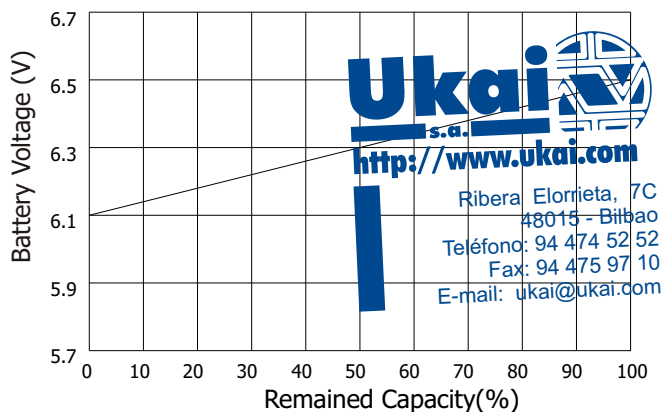

### Self Discharge Characteristics

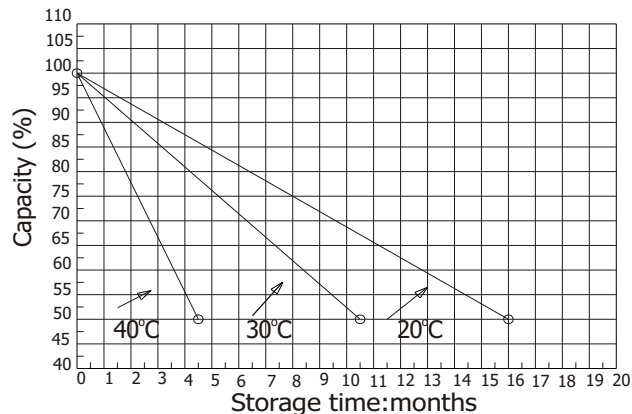

### Constant Current Discharge Ratings - amperes at 25°C

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60 V	5.09	3.18	2.39	1.47	0.94	0.42	0.26	0.14	0.07
1.67 V	4.79	3.01	2.30	1.41	0.93	0.40	0.25	0.14	0.07
1.70 V	4.39	2.90	2.26	1.28	0.90	0.37	0.24	0.14	0.07
1.75 V	4.29	2.81	2.19	1.22	0.86	0.36	0.23	0.14	0.07
1.80 V	3.84	2.68	1.98	1.16	0.82	0.35	0.22	0.13	0.07
1.85 V	3.38	2.57	1.78	1.04	0.75	0.34	0.21	0.13	0.06

### Constant Power Discharge Ratings - watts at 25°C

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60 V	9.63	6.27	5.83	2.79	1.61	0.73	0.45	0.28	0.16
1.67 V	9.33	6.16	4.49	2.76	1.57	0.72	0.44	0.28	0.16
1.70 V	8.93	6.00	4.63	2.73	1.55	0.70	0.44	0.28	0.16
1.75 V	8.39	5.79	4.49	2.69	1.53	0.71	0.43	0.27	0.16
1.80 V	8.06	5.37	4.29	2.56	1.48	0.65	0.43	0.26	0.15
1.85 V	8.01	5.34	4.24	2.51	1.44	0.63	0.42	0.26	0.15



**UKAI BILBAO**  
 Ribera Elorrieta 7C  
 48015 Bilbao  
 Teléfono: 94 474 5252  
 Fax: 94 475 9710  
 e-mail: ukai@ukai.com

**UKAI BARCELONA**  
 C/ Orient 78-84 1º 7ª (Ed. Inbisa)  
 08011 St. Cugat del Vallés  
 Teléfono: 93 284 0898  
 Fax: 93 210 6765  
 e-mail: ukai@ukai.com

**UKAI MADRID**  
 Avda Andalucía 2, 2ª planta local 211  
 28702 San Sebastián de los Reyes  
 Teléfono: 91 659 0328  
 Fax: 91 659 0558  
 e-mail: ukaimad@ukai.com