

WSR36-Bx06-45/10 • SINGLE COLOR Wall Washer




WSR-CABLE-H

WSR-CABLE-M


### Specification

Model	WSR36-BC06-45/10	WSR36-BN06-45/10	WSR36-BF06-45/10
Size	1010mm	1010mm	1010mm
Color	3000k	4000k	6000k
LED	OSRAM LED 36pcs	OSRAM LED 36pcs	OSRAM LED 36pcs
Voltage	24VDC	24VDC	24VDC
Power	36W	36W	36W
CRI(Ra)	>80	>80	>80
Lumex Flux	2100-2200lm	2150-2200lm	2200-2350lm
Housing	Aluminium	Aluminium	Aluminium
Housing color	Silver and matte finish	Silver and matte finish	Silver and matte finish
Diffuser	Clear Glass	Clear Glass	Clear Glass
Cable Entry	Ø6 2×0.75mm <sup>2</sup> H05RVV-F	Ø6 2×0.75mm <sup>2</sup> H05RVV-F	Ø6 2×0.75mm <sup>2</sup> H05RVV-F
Operating temperature	-20°~50°C	-20°~50°C	-20°~50°C
Store temperature	-20°~50°C	-20°~50°C	-20°~50°C
Certificate	CE	CE	CE
IP	IP65	IP65	IP65
Beam Angle	40°-60°	40°-60°	40°-60°

### Dimension

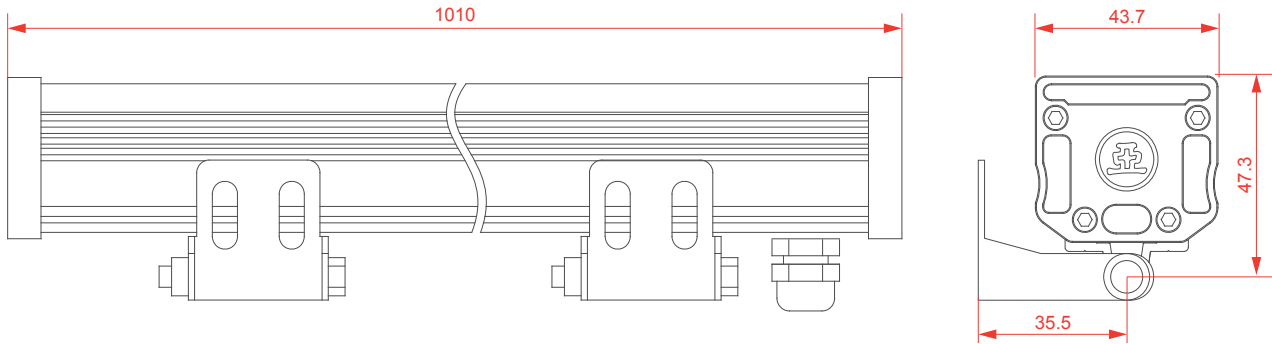

### Mounting

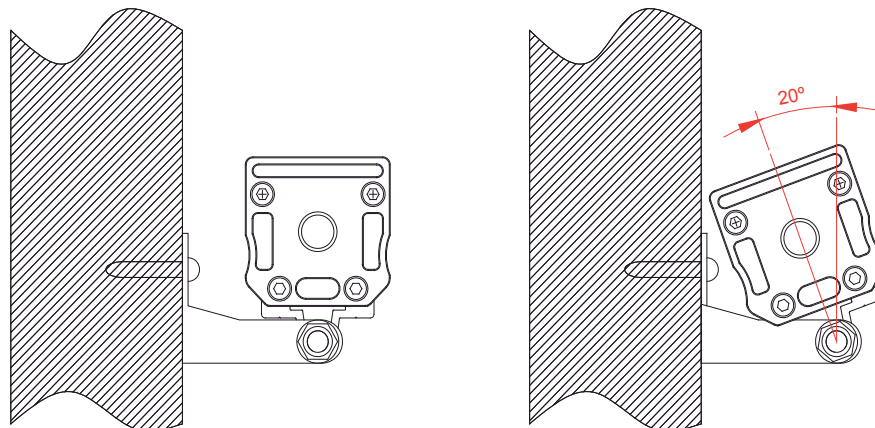

### Connection

1. Brown Wire is the fixture positive electrode, connect with the output positive electrode of DC24V power supply.
2. Blue Wire is the fixture negative electrode, connect with the output negative electrode of DC24V power supply.
3. DC24V Power Supply input port connect the AC220V.

