



Terminal	
No.	Pin Name
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	BLA
16	BLK



- Note:
- *1. LCD Display Type : STN, Negative, Transmissive
 - *2. Viewing Direction : 12H \triangle
 - *3. Duty : 1/16
 - *4. Operating Voltage : 5.0V
 - *5. Backlight Color : White
 - *6. Backlight Supply : 16mA(5.0V TYP.) \triangle
 - *7. Operating Temperature : 0°C~50°C
 - *8. Storage Temperature : -10°C~60°C
 - *9. An external VR(5K) must be connected for Contrast Control. \triangle

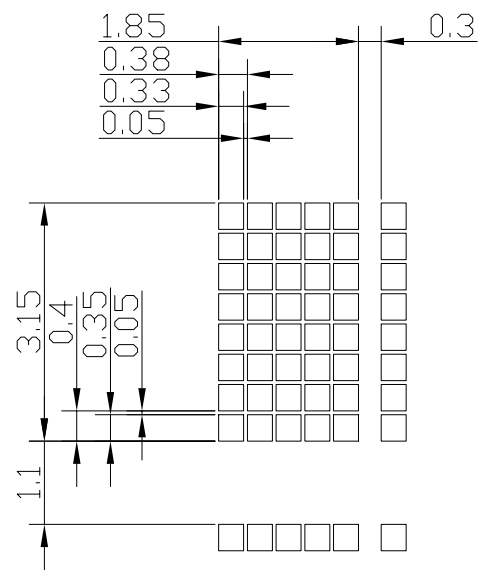

Pixels Details
Scale=10/1

C		
B	Revise BL Current Add Note	Zhou Huifang 2008-09-26
A	Revise FFC Length Revise Viewing Direction	Zhou Huifang 2008-08-20
Rev	Note	Date
Dwg Title LMB162XFW Outline Dwg		
Dwg No.	MK-002579b-1-1	Date 2008-08-12
Scale 3/1	Tol. ±0.5	Unit mm
Approved	Checked	Paper Size A3
		Drawn Zhou Huifang

