

Specifications

Nominal Voltage (V)	12		
Nominal Capacity (AH)	120		
Dimensions	Length	407 mm	16.02 inch
	Width	173 mm	6.81 inch
	Height	224 mm	8.82 inch
	Total Height	231.5 mm	9.11 inch
Approx. Weight	41.50 kgs	91.49 lbs	
Standard Terminals	V8		
Case Material	ABS UL 94-HB		


Characteristics

Capacity	100 hour rate	1.32 A	132.0 Ah
	20 hour rate	6.00 A	120.0 Ah
	10 hour rate	11.76 A	117.6 Ah
	5 hour rate	18.00 A	90.00 Ah
	1 hour rate	66.00 A	66.00 Ah
Internal Resistance		3.50 mΩ	
Max. Discharge Current (5 sec)		3522 A	
Constant Voltage Charge Method	Max. Charge Current	24 A	
	Standby Use	2.23 - 2.27 V /Cell	
	Cycle Use	2.33 - 2.37 V /Cell	
Operating Temperature Range	Discharge:	-20 ~ 55 °C (-4 ~ 131°F)	
	Charge:	-10 ~ 55 °C (14 ~ 131°F)	
	Storage:	-20 ~ 55 °C (-4 ~ 131°F)	
Temperature coefficient	For standby use:	-3.0mV / °C /Cell	
	For cycle use:	-3.3mV / °C /Cell	
Self discharge 25°C (77°F)	After 3-month	94%	
	After 6-month	88%	
	After 12-month	76%	
Temperature dependency of Capacity	40 °C (104 °F)	104%	
	25 °C (77 °F)	100%	
	0 °C (32 °F)	85%	
	-20 °C (5 °F)	65%	

Capacity with Different Temperature

Temperature	-20°C	-10°C	0°C	25°C	40°C
Capacity	60%	75%	85%	100%	104%

Dimensions

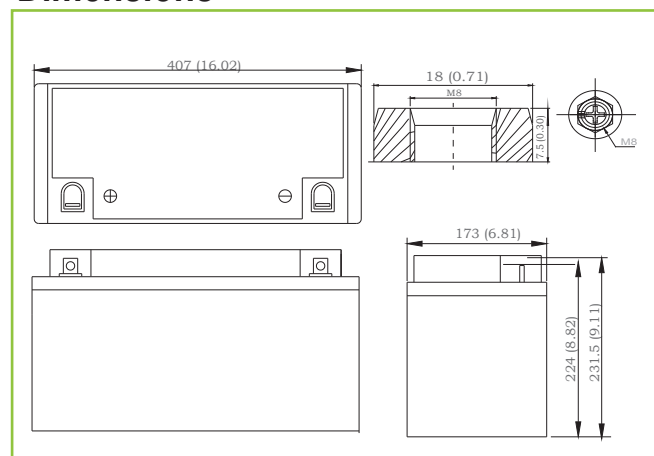

Ukai Bilbao
Ribera Elorrieta,7C
48015 - Bilbao
Tlfno: 94 474 52 52
Fax 94 475 97 10
ukai@ukai.com

Delegación Barcelona
Tlfno: 93 284 08 98
Fax 93 210 67 65
ukaibcn@ukai.com

Delegación Madrid
Tlfno: 91 659 03 28
Fax 91 659 05 58
ukaimad@ukai.com

Delegación Galicia
Tlfno: 651 70 49 21
ukaiglc@ukai.com




LVJ 120-12


CE
ISO 9001 QUALITY ASSURANCE

LVJ 120-12 VRLA (valve-regulated lead acid) GEL battery is designed with 12 years float life at 25°C for wide ranging applications. With superfluous electrolyte evenly distributed in a special PVC-SiO₂ separator and a patented grid design, this battery is perfect for cyclic use, and has a greater ability to withstand heat and deep discharge. Recommended for use with photovoltaic and wind power systems. LiveN is ISO9001 and UL certified for quality assurance.

Terminal Voltage (V) and Discharge Time

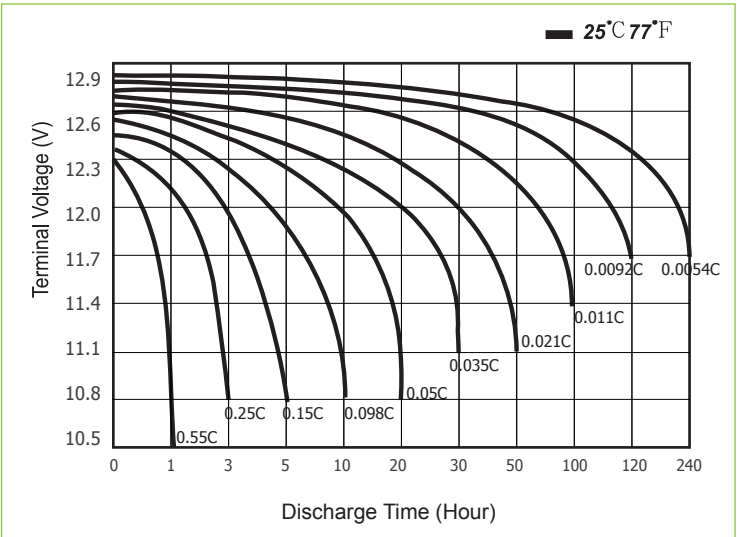

Battery Voltage and Charge Time for Standby Use

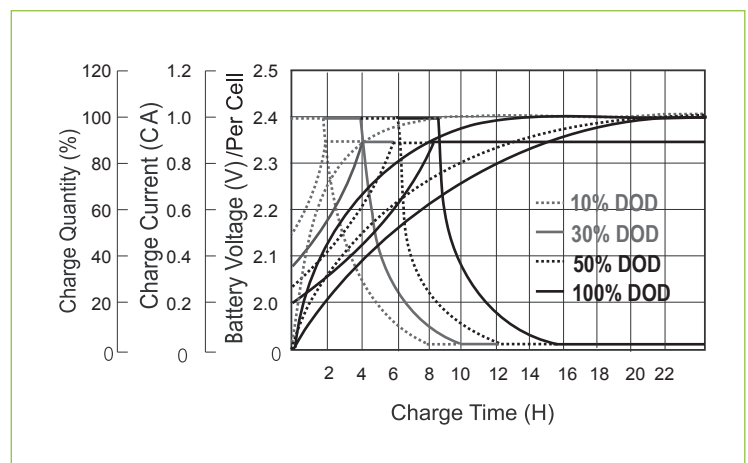

Cycle Service Life

